


AI Dynamic Face Recognition Terminal quick guide

Version: V10.7.2

1.Appearance Display

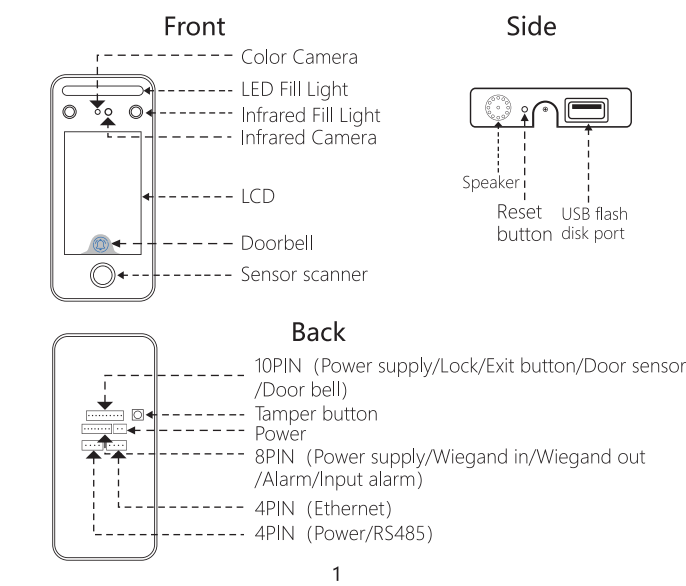

6.Time Attendance Management

This chapter is used for setting shifts and attendance rules

1、Attendance Rule

Touch the screen and a menu bar will pop up on the right side of the screen, click > 【Shift】> 【Atten rules】

Item	Meaning
Re verify	Check if users make punch repeatedly within this range, if records interval is less than this value, records won't be stored
Log Warning	When rest available storage capacity is less than this value, device will alarm
Save Photo	If select 'Yes', when device connect to software, captured photo when users verify face can be shown in software
Stranger Photo	If select 'Yes', and enable 'save photo', when device connect to software, captured photo when strangers verify face can be shown in software
Default Shift	Set default shift, when you add users, they will apply this default shift
Excel Pwd	Set password for attendance report
Late time	When user's late arrival time exceeds *** mins, then it is counted as late arrival.
Lea time	When user's early leave time exceeds *** mins, then it is counted as early leave.

2、Edit Shift


【Download Shift】: Touch the screen and a menu bar will pop up on the right side of the screen, click > 【Shift】> 【Atten rules】, then insert U-disk. Click 【Download Shift】, then you can download shift arrangement in excel form, Also you can edit the form on PC. Pls refer to below picture:

Shift										
Note: A, shift name: up to 48 words. B, Section type: 0: normal attendance.1: overtime. C, cut off time: if the punch before the cut off time ,it will calculate as the previous day										
NO.	Name	Sec1			Sec2			Sec3		
		IN	OUT	Sec.1 type	IN	OUT	Sec.1 type	IN	OUT	Sec.1 type
1	Day Shift	08:30	12:00	0	13:30	18:00	0	18:30	21:00	1
2	Night Shift	22:00	06:00	0						

Edit shift arrangement according to the prompts of form header. Maximum 8 shifts can be set. Click 【Save】 after editing and save the file into U-disk.

2.Wall Mount Installation

- 1) The installation height should be selected according to the actual punching personnel.
- 2) Disassemble rear hanging plate and attach it to the wall to select the suitable installation position, then make a mark.
- 3) Drilling on wall according to the marked position.
- 4) Fix the rear hanging plate on the wall.
- 5) Install the device on the rear hanging plate and fix it, then power it up.

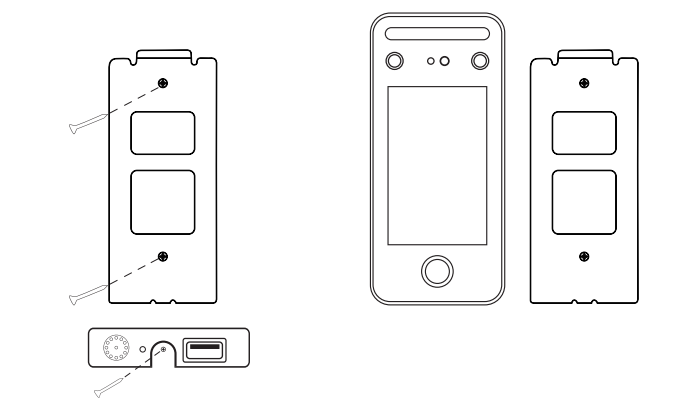

3.Attention

- 1) Do not operate with power during installation.
- 2) When connecting electric lock, 12V/2A power supply is recommended.
- 3) Do not install the device in direct sunlight or in a humid place.
- 4) Please read the wiring diagram of access control, and wire it according to the rules strictly.
- 5) On the situation that static electricity is a bit heavy, please connect ground wire first and then connect other wires, which can protect the device from damaging in static electricity.

Note:

1) Attendance time must be in the format of time, and attendance type must be in the format of digits. So when you handle the setting, pls pay attention that the input method is in English half-angle status. Checking Method: For example, when you input 10:30, double click this cell, then software will automatically turn the digits into 10:30:00.

2) If you set the shift of cross time, then the Clock-in before the cross time will be counted as the record of previous day. And shift should start after the cross time. For example:

Shift										
Note: A, shift name: up to 48 words. B, Section type: 0: normal attendance.1: overtime. C, cut off time: if the punch before the cut off time ,it will calculate as the previous day										
NO.	Name	Sec1			Sec2			Sec3		
		IN	OUT	Sec.1 type	IN	OUT	Sec.1 type	IN	OUT	Sec.1 type
1	Shift1	23:00	08:00	0						09:00

Cross time is set at 09:00am. Then shift should start after 09:00, and Clock-in record before 09:00am on Tuesday should be counted as the record of Monday.

3) If you don't need to clock at noon, combine the two sections into one. For example: 08: 30-12: 00 13: 30-17: 50,it can be set to section 1: 08: 30-17: 50


4) Time Skip setting is not allowed. For example, When you complete the setting of Section 1, you cannot skip Section 2 and get to set Section 3.

【Upload shift】: After editing, insert U-disk and click 【Upload Shift】, then you can upload the edited shift arrangements into device.

7.Report

Touch the screen and a menu bar will pop up on the right side of the screen, click > 【Report】, Insert U-disk, and input the start and end time that you need to check. Click “OK”to download the report. The report includes original record sheet(Original Record), attendance list(Schedule)and summary sheet (Summary Report).

4.User Management

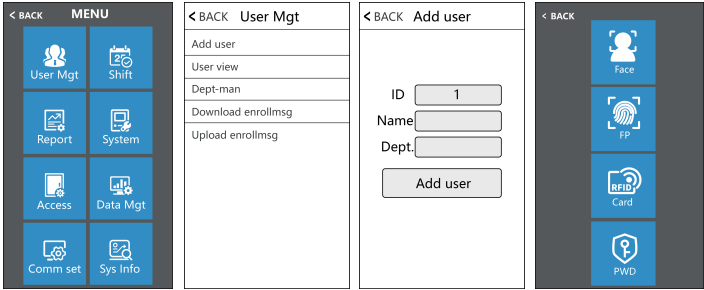

Touch the screen and a menu bar will pop up on the right side of the screen, click > 【User Mgt】> 【Add user】, when there is a registered admin, After passing the verification of admin then the menu can be entered

【ID】 When registering, each user can only have one unique 'ID'.

【Name】 Input、 edit name by T9 input method.

【Face】 Gaze at the camera to complete the face registration.

Note: Please stand directly in front of the device, face the camera, and keep the entire face displayed in the frame, In order to maintain a good face recognition effect.The following picture is for your reference.



【Fingerprint】 Press finger three time to finish enrollment.

【Password】 IAn ID can only register one password. After clicking the password icon, enter the password to be set and then press ok to confirm the password again.

【Password Verification】 Verify password by touching the face recognition area of the screen then click then input ID-click 'OK'-input password-click 'OK'

【Card】 Each user can only register one card.

Original Record: You can check all users' attendance records in the sheet. Pls refer to below picture:

Original record																															
Date:2019-8-1~2019-8-31																															
ID:1 Name:Lucas Dept.:Office Shift:Day Shift																															
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	
08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	08:25	
12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	12:00	
18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	18:00	
Original record Schedule Summary Report WS																															

Schedule: Attendance machine can automatically analysis the clock-in and clock-out data, and transmit these data in EXCEL file to the U disk. Format as below: (Remark: Red text indicates that the attendance is abnormal, such as late, early leave. Blue means overtime)

schedule													
ID:1	Name:Lucas												
Dept.:Office	Shift:Day Shift										Date:2019-8-1~2019-8-31		
Date	week	Sec1		Sec2		Sec3		Work hours		OT hours	Late minutes	Leave minutes	Truancy
		IN	OUT	IN	OUT	IN	OUT	Normal	Actual				
8-1	THU	08:25	12:03	13:26	18:06	18:06				8	8	0	0
Original record schedule Summary Report													

Summary Report: It is a Statistics display of employee attendance for one month

Summary Report													
Date: 2019-8-1~2019-8-31													
ID	Name	Dept.	Work hours		Late minutes		Leave minutes		OT hours		Work Dates(Normal/Actual)		Truancy
			Normal	Actual	TIMES		Minutes	TIMES	Minutes	Normal			
1	Lucas	Office	248.0	248					77.5		31.0/31.0		0
Original record schedule Summary Report													

8.System settings

Touch the screen and a menu bar will pop up on the right side of the screen, click > 【System】

【User View】: You can quickly locate the user you want to edit by 【Find】 or 【Find Name】 at the top of the page. Or slide the screen to search user.

- 1) Edit user information: Select user you want to edit, you can change any information in this page except 'user ID'
- 2) Delete user: Select user you want to edit→Delete
- 3) Advanced setup: Set user shift settings and access control settings on 【Advanced setup】 menu

【Department】 Set the department that user belongs to

【Privilege】 User and Admin and Super.user can be selected

【User】: If there is Admin in this device, user is not allow to access into menu

【Admin】: The manager of this device. Only admin has permission to access into menu.

【Super.user】: Only when there is Admin in device, then can enroll Super.user, but Super.user can only operate part of menu, such as register users

5.Download and upload user information

Touch the screen and a menu bar will pop up on the right side of the screen, click > 【User Mgt】> 【Download enrollmsg】,insert U-disk in device to download, 3 files will be exported as below:

1. User data file (AFP_001.dat): It can be used to synchronized users between devices, and '001' represents device ID
2. User's enrolled photo(EnrollPhoto)
3. User information Excel sheet(Staff): Users can edit it in PC then upload back to device, please refer to below picture:

Staff													
Note:A, Enroll number: only fill in the number (maximum of 8) required. B, Name: up to 48 words. C, Department: up to 48 words. D, Shift: 0'N. E, Admin: 0 or not filled: user. 1: admin. F, Fingerprint. Face: no need to fill in. G, Password: up to 8 digit													
ID	Name	Dept.	Shift	Admin	FP	Face	PWD	Card	Lock timezone	GRP	Birthdate	Start:	End:
1	Jessica		0	0	1	0	123	0	0	0			
2	Sophie		0	0	1	1	123	0	1	0			

Fill in personnel information according to the prompt of form header. As for "Shift" item, it is the editing shift number in the time attendance setting. When complete the editing. Directly Click 【Save】, and save the edited file into U-disk.

After editing shift form, Touch the screen and a menu bar will pop up on the right side of the screen, click > 【User Mgt】, then insert U-disk, click 【Upload enrollmsg】 and transmit the edited user information to device.

Remark: For Lock Time zone, start time and end time, Pls refer to Chapter 9 Access

1.Device Setup

Item	Meaning
Time	Set device time
Time fmt	24H and 12H format can be selected
Date fmt	Select different date format
Language	Change device displayed language
Voice	Set the volume of speaker
Screen Idle	How long does it take to enter screen saver when the main Interface is not operating
bio-assay	Verify that the user is a live person instead of photo.

2、Advanced setup

Item	Meaning	
Max Admin	Set the maximum number of device admin	
Verify Mode	FA/C/P	No matter what kind of verification method can be verified
	Others	Need to verify two verification methods together
Visitor QRCode	Whether enable scanning QRcode function or not. Connect device to our cloud software and generate QRCode then verify it in device	
1:N Identify	Set the threshold of face recognition	
Live threshold	When enable "bio-assay", the threshold of face recognition	
Testing	Check whether the camera is normal	
Firmware upgrade	Insert U-disk (FAT32 format) to do device firmware upgrade	

