



EMC Data Sheet

***Commander
C200, C300
Frame size 1
All models***

Variable Speed AC drive for
induction motors

Commander C200, C300 Frame size 1 EMC Data Sheet

Safety Warnings



A Warning contains information which is essential for avoiding a safety hazard.



A Caution contains information which is necessary for avoiding a risk of damage to the product or other equipment

NOTE:

A Note contains information which helps to ensure correct operation of the product.

Installation and Use

The information given in this data sheet is derived from tests and calculations on sample products. It is provided to assist in the correct application of the product, and is believed to correctly reflect the behaviour of the product when operated in accordance with the instructions. The provision of this data does not form part of any contract or undertaking. Where a statement of conformity is made with a specific standard, the manufacturer takes all reasonable measures to ensure that its products are in conformance. Where specific values are given these are subject to normal engineering variations between samples of the same product. They may also be affected by the operating environment and details of the installation arrangement.

The manufacturer accepts no liability for any consequences resulting from inappropriate, negligent or incorrect installation of the equipment.

The contents of this data sheet are believed to be correct at the time of printing. The manufacturer reserves the right to change the specification of the product or its performance, or the contents of the data sheet, without notice.



All electrical installation and maintenance work must be carried out by qualified electricians, familiar with the requirements for safety and EMC. The installer is responsible for ensuring that the end product or system complies with all relevant laws in the country where it is used.

Copyright

All rights reserved. No parts of this data sheet may be reproduced or transmitted in any form by any means, electrical or mechanical including photocopying, recording or by an information storage or retrieval system, without permission in writing from the publisher

Copyright © 7th June 2019 Control Techniques Ltd

Commander C200, C300 Frame size 1 EMC Data Sheet

Contents

1. Products	4
2. Immunity.....	4
3. Emission.....	6
3.1 General.....	6
3.2 Low Frequency Emissions	7
3.3 Conducted Emissions	12
3.4 Radiated Emissions	14
4 Installation and Wiring Guidelines.....	17
4.1 Ground (earth) connections	17
4.2. Special requirements	18

Commander C200, C300 Frame size 1 EMC Data Sheet

1. Products

This EMC data sheet applies to the following products:

Table 1 Model numbers

Rated voltage (V)	Rated power (kW)	Model number
100	0.25	xxxx-011 00017A
100	0.37	xxxx-011 00024A
200	0.25	xxxx-012 00017A
200	0.37	xxxx-012 00024A
200	0.55	xxxx-012 00033A
200	0.75	xxxx-012 00042A

Where: xxxx denotes C200 or C300

Models with the same voltage and power ratings are identical in construction. The displays, user menus and firmware are optimised for each application.

2. Immunity

2.1.1 Immunity Compliance

References to IEC standards are used throughout this EMC data sheet. In the EU the applicable standard is the equivalent harmonised EN standard.

Table 2 Immunity test levels

Standard	Type of immunity	Test specification	Application	Level
IEC 61000-4-2	Electrostatic discharge	6 kV contact discharge 8 kV air discharge	Module enclosure	Level 3 (industrial)
IEC 61000-4-3	Radio frequency radiated field	Prior to modulation: 10 V/m 80 - 1000 MHz 3 V/m 1.4 - 2.0 GHz 1 V/m 2.0 - 2.7 GHz 80% AM (1 kHz) modulation Safe Torque Off (STO) tested to : 20V/m 80 – 1000 MHz 6V/m 1.4 - 2.0 GHz 3V/m 2.0 - 2.7 GHz	Module enclosure	Level 3 (industrial)
IEC 61000-4-4	Fast transient burst	5/50 ns 2 kV transient at 5 kHz repetition frequency via coupling clamp	Control lines	Level 4 (industrial harsh)
		5/50 ns, 2 kV transient at 5 kHz repetition frequency by direct injection	Power lines	Level 3 (industrial)
IEC 61000-4-5	Surges	Common mode 4 kV 1.2/50µs wave shape	AC supply lines: line to earth	Level 4
		Differential mode 2 kV	AC supply lines: line to line	Level 3
		Common mode 1 kV	Control lines	(Note:1)
IEC 61000-4-6	Conducted radio frequency	10 V prior to modulation 0.15 - 80 MHz 80% AM (1 kHz) modulation	Control and power lines	Level 3 (industrial)
IEC 61000-4-11	Voltage dips, short interruptions & variations	All durations	AC supply lines	

Commander C200, C300 Frame size 1 EMC Data Sheet

Standard	Type of immunity	Test specification	Application	Level
IEC 61000-4-8	Power frequency magnetic field	1700 A/m RMS. 2400 A/m peak (2.1 mT RMS 3 mT peak) continuous at 50 Hz	Module enclosure	Exceeds level 5 (Note: 2)
IEC 61000-6-1	Generic immunity standard for the residential, commercial and light - industrial environment			Complies
IEC 61000-6-2	Generic immunity standard for the industrial environment			Complies
IEC 61800-3	Product standard for adjustable speed power drive systems (immunity requirements)		Meets immunity requirements for first and second environments	

Notes:

1 Applies to ports where connections may exceed 30 m length. Special provisions may be required in some cases – see additional information below.

2 Limited by test equipment capability

Unless stated otherwise, immunity is achieved without any additional measures such as filters or suppressors. To ensure correct operation, the wiring guidelines specified in the Power Installation Guide must be followed. All inductive components such as relays, contactors, electromagnetic brakes must be fitted with appropriate suppression.

2.1.2 Surge immunity of control circuits

The input/output ports for the control circuits are designed for general use within machines and small systems without any special precautions.

These circuits meet the requirements of IEC 61000-6-2 (1 kV surge) provided that the 0 V connection is not earthed. In general the circuits cannot withstand the surge directly between the control lines and the 0 V connection.

The surge test simulates the effect of a lightning strike, or a severe electrical fault, where high transient voltages may exist between different points in the grounding system. This is a particular risk where the circuits are routed outside a building, or if the grounding system in a building is not well bonded.

In applications where control circuits are exposed to high-energy voltage surges, some special measures are required to prevent malfunction or damage. In general, circuits that are routed outside the building where the drive is located, or are longer than 30 m need additional protection. One of the following techniques should be used:

1. Galvanic isolation, Do not connect the control 0 V terminal to ground. Avoid loops in the control wiring, i.e. ensure every control wire is routed next to its associated return (0 V) wire.
2. Screened cable. The cable screen may be connected to ground at both ends. In addition the ground conductors at both ends of the cable must be bonded together by a power ground cable (equal potential bonding cable) with cross-sectional area of at least 10 mm². This ensures that in the event of a fault, the fault current flows through the ground cable and not through signal cable screen. If the building or plant has a well-designed common bonded network this precaution is not necessary.
3. Additional over-voltage suppression. This applies to analogue and digital inputs and outputs. A zener diode network or a commercially available surge suppressor may be connected between the signal line and 0 V as shown in Figures 1 and 2.

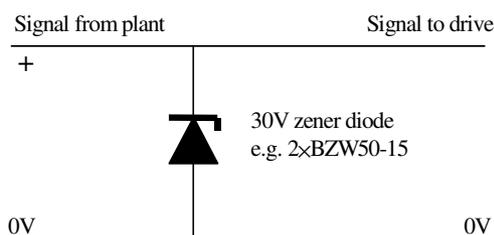


Figure 1 Surge suppression for digital and uni-polar analogue inputs and outputs

Commander C200, C300 Frame size 1 EMC Data Sheet

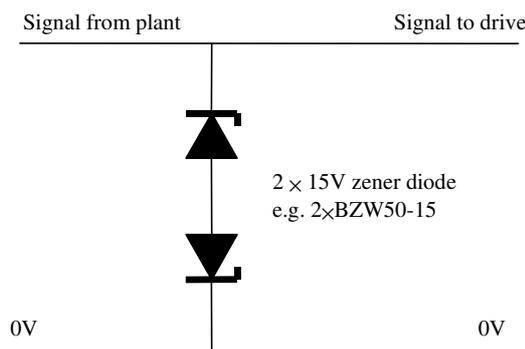


Figure 2 surge suppression for bipolar analogue inputs and outputs

Surge suppression devices are available as rail-mounting modules, e.g. from Phoenix Contact GmbH:

Unipolar	TT-UKK5-D/24 DC
Bipolar	TT-UKK5-D/24 AC

These devices are not suitable for encoder signals or fast digital data networks because the capacitance of the zener diodes adversely affects the signal. Most encoders have galvanic isolation of the signal circuit from the motor frame, in which case no precautions are required. For data networks, follow the specific recommendations for the particular network.

3. Emission

3.1 General

Emission occurs over a wide range of frequencies. The effects are divided into three main categories:

- Low frequency effects, such as supply harmonics and notching.
- High frequency emission below 30 MHz where emission is predominantly by conduction.
- High frequency emission above 30 MHz where emission is predominantly by radiation.

3.1.1 Environment and Equipment Categories

The EMC product standard for variable speed drives, IEC 61800-3 defines two environments and four equipment categories:

- First Environment - This includes domestic premises, and establishments that share a low-voltage power supply network with buildings used for domestic purposes. Examples include: houses, apartment buildings, shops, commercial property and industrial premises that share a supply with nearby residential property.
- Second Environment - This includes all establishments other than those directly connected to a low-voltage power supply network which supplies buildings used for domestic purposes. Examples include Factories, industrial plants and areas of any building supplied by a dedicated transformer.
- Equipment Category C1 - Equipment that is intended for use in the First Environment
- Equipment Category C2 - Equipment that is neither a plug-in device nor a movable device. This type of equipment may be used in the First Environment if installed and commissioned by a professional (i.e. person or organisation having the necessary skills to install and commission power drive systems, including EMC requirements).
- Equipment Category C3 - Equipment that is intended only for use in the Second Environment. The equipment is not intended for use in the First Environment
- Equipment Category C4 - Equipment with rated voltage $\geq 1000\text{V}$ or rated current equal $\geq 400\text{A}$ or intended for use as part of a complex system. This equipment is intended only for use in the Second Environment.

Commander C200, C300 Frame size 1 EMC Data Sheet

The drives are capable of meeting the requirements of Equipment Category C3 without external filters or line reactors. They are capable of meeting the requirements of Equipment Category C2 when installed with external EMC filters and line reactors.

NOTE:

In a domestic environment this product may cause radio interference in which case supplementary mitigation measures may be required.

Examples of common mitigation methods include additional filtering, a dedicated supply transformer and use of screened cables.

3.2 Low Frequency Emissions

3.2.1 Supply voltage notching

The drives do not cause notching of the supply voltage.

3.2.2 Voltage fluctuations and flicker

When running at constant load the drive does not generate voltage fluctuations or flicker. Care must be taken to ensure that the application does not cause the load to vary rapidly, resulting in flicker. Cyclical variations with frequency in the region of 2 Hz to 20 Hz are likely to cause irritating lighting flicker and should be avoided.

When power is first applied the drive draws an inrush current which is lower than the rated input current. This meets the requirements of IEC 61000-3-3.

3.2.3 Common mode harmonic emissions (crosstalk)

The drives generate switching waveforms with frequency components in the audible range as well as the frequency range commonly used by telephone and data systems. The installation instructions include recommendations for segregation and shielding of power and signal cables. Refer to the installation instructions contained in the drive Power Installation Guide and to section 4 of this data sheet.

3.2.4 Supply harmonics

The drive input current contains harmonics of the supply frequency. The harmonic levels are affected to some extent by the supply impedance (fault current level). Table 4 shows the levels calculated with a fault level of 5 kA. This is typical of a light industrial installation. This meets and exceeds the requirements of IEC 61800-3 (fault current 250 times the drive rating).

To give some indication of how the currents vary with source impedance, and to allow a realistic assessment of operation on a “weak” supply, Table 5 shows the levels for a low-current supply of residential type, as specified in IEC 60725¹. Note that harmonic currents from order 9 upwards are considerably reduced.

The calculations have been verified by laboratory measurements on sample drives.

Note that the RMS current in the table may differ from the maximum specified in the installation guide, since the latter is a worst case value provided for safety reasons which takes account of permitted supply voltage imbalance. The motor efficiency also affects the current. A standard IE2, 4 pole motor has been assumed. For balanced sinusoidal supplies, all even and triple harmonics are absent. The supply voltages used for the calculations are 115 V and 230 V at 50 Hz. The harmonic percentages do not change substantially for other voltages and frequencies within the drive specification.

3.2.5 Input line reactors (line chokes)

Where necessary, a reduction in harmonic current levels can be obtained by fitting reactors in the input supply lines. This also gives increased immunity to supply disturbances such as voltage surges caused by the switching of high-current loads or power factor correction capacitors on the same supply circuit.

Table 6 shows the harmonic currents when fitted with the line reactors shown in Table 3

¹ $Z = 0.4 + j0.25 \Omega$

Commander C200, C300 Frame size 1 EMC Data Sheet

Table 3 Recommended line reactors

Line reactor inductance (mH)	Line reactor rated current (A)	Line reactor Part No.
1.0	15.1	4402-0225
2.25	6.5	4402-0224

The line reactors cause a slight reduction in the DC link voltage, which will normally still permit the full rated torque to be developed in a standard motor. Higher values of inductance should not be used unless some reduction of available torque at maximum speed is acceptable. Lower values can be used, and the resulting harmonics currents can be estimated by linear interpolation between the values for no reactor and the reactor value in the tables below. Reactor current ratings must be at least equal to the RMS values shown, and peak current rating (to avoid magnetic saturation) should be twice that value. If in doubt, a test should be carried out to ensure that enough full-speed torque is available.

3.2.1 Effect of load on harmonics

With reducing load, the major harmonics fall in absolute magnitude, although they generally rise as a fraction of the fundamental. Note that it is mechanical load power that controls input current, i.e. the product of torque and speed. As the speed is reduced, the motor current becomes increasingly reactive so the drive input current falls, together with its harmonics

3.2.2 Product family standards for harmonics

IEC 61000-3-2

This standard applies to equipment rated $\leq 16A$ per phase with a supply voltage of 230/ 400 V, 50 Hz. When applied to equipment for professional use this standard sets harmonic limits for ratings below 1 kW input power. This applies to the 200 V rated drive models except for the 0.75 kW rating, where input power exceeds 1 kW at full load because the typical motor efficiency is 70 %.

Table 7 shows the current harmonics when fitted with the minimum line inductance necessary to comply with the limits in IEC 61000-3-2, Table 1.

The choke current ratings are considerably lower than the drive nominal input current ratings because of the improved power factor of the drive when using the choke.

The chokes cause some reduction in the voltage supplied to the drive. This tends to reduce the available torque at maximum speed. The drive uses slip compensation to maintain the torque, resulting in some increase in motor current. For a standard 4-pole motor with the 0.25 kW and 0.37 kW drives the current remains within the motor rating, so there is no loss of specified performance. With the 0.55 kW drives a reduction in full-speed torque of 18% occurs. If this is unacceptable then the 0.75 kW drive should be used. For other motors, a test should be carried out to ensure that sufficient full-speed torque is available.

System designers should consider carefully whether conformance to these standards is really a requirement for their application. It is the total input power of the system or machine which must be less than 1 kW for these standards to apply. This is unusual in professional machinery.

EN 12015 Product family standard for lifts, escalators and moving walks – Emission.

EN 12015 states that Lifts, escalators and moving walks are considered as professional equipment as defined by EN 61000-3-2 therefore the requirements of EN 61000-3-12:2005 shall be applied as well to a system (equipment) less than 16 A per phase.

In general, single phase drives and drives with power ratings less than 2.2 kW tend to be used for auxiliary lift functions with rated power much less than the main hoist drive, for example a Door Controller. Single phase drives do not comply with the limits in EN 12015.

Commander C200, C300 Frame size 1 EMC Data Sheet

It may be necessary to ensure that their harmonic contributions are not excessive, although generally their power ratings will be too small to be significant. It is important that test conditions should be realistic and/or calculations done correctly, in order for harmonic emissions from small drives to be correctly assessed.

The mains current harmonics for the complete lift system will be the vector sums of the harmonic currents for all of the individual electrical loads in the system. Usually the main lift drive(s) will dominate the electrical load, and it will be sufficient to ensure that these meet the harmonic requirements.

3.2.3 Further measures for reducing harmonics

It is unusual for harmonics to pose a problem unless more than 50 % of the supply system capacity is accounted for by drives or other power electronic loads. Harmonic currents from drives add approximately arithmetically. It is usually most cost-effective to analyse a complete installation for harmonic current or voltage and to apply remedial measures such as harmonic filters, if necessary, for the entire installation at the common supply point.

Commander C200, C300 Frame size 1 EMC Data Sheet

Table 4 Harmonic currents without line reactor, 5kA supply

Rated Voltage (V)	Motor power (kW)	RMS current (A)	Fundamental current (A)	THD (%)	Harmonic current (A)																		
					3	5	7	9	11	13	15	17	19	21	23	25	27	29	31	33	35	37	39
100	0.25	3.88	1.90	176.40	1.81	1.61	1.35	1.08	0.83	0.67	0.59	0.55	0.52	0.46	0.37	0.28	0.20	0.15	0.13	0.12	0.11	0.08	0.06
100	0.37	4.71	2.50	160.73	2.30	1.97	1.55	1.13	0.83	0.71	0.70	0.68	0.61	0.50	0.38	0.29	0.24	0.21	0.17	0.13	0.10	0.09	0.09
200	0.25	4.13	1.90	193.81	1.81	1.64	1.42	1.19	0.99	0.85	0.78	0.73	0.68	0.60	0.50	0.38	0.26	0.17	0.12	0.11	0.11	0.10	0.07
200	0.37	5.04	2.50	176.53	2.33	2.03	1.65	1.29	1.02	0.91	0.91	0.91	0.85	0.73	0.57	0.40	0.27	0.21	0.18	0.16	0.13	0.09	0.07
200	0.55	8.38	3.70	205.97	3.58	3.39	3.12	2.79	2.41	2.01	1.62	1.25	0.91	0.63	0.40	0.25	0.18	0.16	0.15	0.13	0.11	0.08	0.05
200	0.75	9.97	4.70	189.83	4.46	4.09	3.62	3.11	2.63	2.19	1.80	1.42	1.06	0.72	0.44	0.27	0.22	0.22	0.19	0.13	0.08	0.07	0.09

Table 5 Harmonic currents without line reactor, IEC 60725 supply (Z = 0.4 + j0.25 Ohms)

Rated Voltage (V)	Motor power (kW)	RMS current (A)	Fundamental current (A)	THD (%)	Harmonic current (A)																		
					3	5	7	9	11	13	15	17	19	21	23	25	27	29	31	33	35	37	39
100	0.25	2.83	1.90	112.90	1.61	1.16	0.67	0.27	0.09	0.12	0.09	0.05	0.05	0.05	0.03	0.02	0.03	0.02	0.02	0.02	0.01	0.01	0.01
100	0.37	3.59	2.40	107.17	2.06	1.41	0.74	0.24	0.13	0.15	0.09	0.05	0.06	0.05	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01
200	0.25	3.11	1.90	132.50	1.69	1.37	0.98	0.59	0.27	0.10	0.11	0.11	0.08	0.05	0.04	0.05	0.04	0.03	0.02	0.03	0.02	0.02	0.02
200	0.37	3.96	2.50	126.62	2.19	1.72	1.17	0.64	0.25	0.11	0.15	0.13	0.07	0.05	0.06	0.05	0.03	0.03	0.03	0.03	0.02	0.02	0.02
200	0.55	5.43	3.60	113.70	3.09	2.24	1.30	0.54	0.19	0.24	0.19	0.10	0.09	0.09	0.06	0.05	0.05	0.04	0.03	0.03	0.03	0.02	0.02
200	0.75	6.73	4.60	108.37	3.85	2.67	1.43	0.49	0.24	0.29	0.18	0.10	0.12	0.09	0.06	0.06	0.06	0.04	0.04	0.04	0.03	0.03	0.03

Table 6 Harmonic currents with line reactor, 5kA supply

Rated voltage (V)	Motor power (kW)	RMS current (A)	Fundamental current (A)	THD (%)	Harmonic current (A)																	Line reactor inductance (mH)		
					3	5	7	9	11	13	15	17	19	21	23	25	27	29	31	33	35		37	39
100	0.25	2.99	1.90	122.75	1.66	1.28	0.83	0.43	0.18	0.13	0.13	0.09	0.06	0.05	0.05	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.02	1.0
100	0.37	3.79	2.50	117.52	2.14	1.59	0.98	0.46	0.18	0.17	0.15	0.09	0.07	0.07	0.05	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.02	1.0
200	0.25	2.91	1.90	119.83	1.63	1.23	0.78	0.38	0.16	0.14	0.12	0.08	0.06	0.06	0.05	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.01	2.25
200	0.37	3.71	2.40	114.35	2.10	1.53	0.90	0.39	0.17	0.17	0.14	0.08	0.07	0.07	0.05	0.04	0.04	0.03	0.02	0.02	0.02	0.02	0.02	2.25
200	0.55	5.70	3.60	122.65	3.18	2.44	1.59	0.82	0.34	0.25	0.25	0.18	0.11	0.11	0.10	0.07	0.06	0.06	0.05	0.04	0.04	0.04	0.03	1.0
200	0.75	7.08	4.60	117.76	3.99	2.97	1.83	0.86	0.34	0.32	0.28	0.17	0.13	0.13	0.10	0.07	0.07	0.07	0.05	0.05	0.05	0.04	0.03	1.0

Commander C200, C300 Frame size 1 EMC Data Sheet

Table 7 Harmonic currents with minimum line reactor inductance needed to comply with IEC 61000-3-2, Table 1

Rated voltage (V)	Motor power (kW)	RMS current (A)	Fundamental current (A)	THD (%)	Harmonic current (A)																	Minimum line reactor inductance (mH)		
					3	5 ²	7	9	11	13	15	17	19	21	23	25	27	29	31	33	35		37	39
Limits from IEC 61000-3-2 Table 1					2.3	1.14	0.77	0.40	0.33	0.21	0.15	0.13	0.12	0.11	0.10	0.09	0.08	0.08	0.07	0.07	0.06	0.06	0.06	
200	0.25	2.80	1.90	112.41	1.59	1.14	0.65	0.28	0.14	0.14	0.10	0.06	0.06	0.05	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	3.0
200	0.37	3.33	2.40	94.83	1.91	1.14	0.46	0.18	0.18	0.11	0.08	0.07	0.05	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	4.9
200	0.55	4.47	3.50	79.26	2.49	1.14	0.33	0.28	0.15	0.12	0.09	0.06	0.06	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	6.1
200	0.75	5.47	4.40	72.16	2.95	1.14	0.36	0.30	0.15	0.14	0.08	0.08	0.05	0.05	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.01	6.7

² The line reactor inductance was increased until the amplitude of the 5th harmonic was just below the limit in IEC 61000-3-2, Table 1 (1.14A).

Commander C200, C300 Frame size 1 EMC Data Sheet

3.3 Conducted Emissions

3.3.1 General

Radio frequency emission in the range from 150 kHz to 30 MHz is generated by the switching action of the main power devices (IGBTs) and is mainly conducted out of the equipment through electrical power wiring.

In order to comply with emission standards, a shielded (screened) cable must be used to connect the variable speed drive to the motor. Most types of cable are acceptable provided that it has an overall screen that is continuous for its entire length. For example, steel wire armoured cable is acceptable.

3.3.2 Measures to reduce conducted emissions

The following measures can be used to reduce conducted emissions:

- Use the lowest possible switching frequency.
- Use the shortest possible motor cable length
- Follow the installation instructions given in section 4 of this data sheet

3.3.3 Internal filtering

The drive contains a cost-effective internal input filter which gives a reduction of about 30 dB in the level of emission at the supply terminals. This filter (in conjunction with a screened motor cable) is sufficient to meet Equipment Category C3 (See section 3.1 for definition of equipment categories).

The Power Installation Guide gives instructions on how to remove and replace the internal EMC filter.

	When the internal EMC filter is connected, the earth leakage current is > 3.5 mA. A permanent fixed earth connection is necessary to avoid an electric shock hazard. Further precautions, such as a supplementary earth connection or earth monitoring system, may also be required.
--	--

3.3.4 Use of a ferrite ring

Passing the motor cable through a ferrite ring can reduce conducted emissions.

Two sizes of ferrite ring have been used for testing, as shown in Table 8.

The ferrite ring should be mounted close to the drive, and the output power conductors (U, V and W but not E) should be passed once or twice through the central aperture, all together in the same direction.

Table 8 Ferrite rings

Manufacturer	Manufacturers Part No.	CT Part No.	Dimensions (mm)		
			Outside diameter	Inside diameter	Thickness
Epcos	B64290 L0040 X 830	4200-3608	58.3	40.8	17.6
	B64290 L0048 X 830	4200-0003	34.0	20.5	12.5

3.3.5 External filtering

If the equipment needs to meet the generic standard for emission IEC 61000-6-4 or operate in the First Environment then an optional external EMC filter is necessary.

Suitable filters are available from Control Techniques. The ratings and part numbers are shown in Table 9. Table 9 also shows the typical leakage currents due to the external EMC filter. The external filter should be used in conjunction with the internal filter. The leakage currents do not add arithmetically because they have different frequencies.

Table 9 External filters

Filter type	Part No.	Rated voltage (V)	Rated Current (A)	Typical operational earth leakage current (mA)
Standard	4200-1000	240	11	24.6
Low leakage	4200-1001	240	11	2.38

Commander C200, C300 Frame size 1 EMC Data Sheet

3.3.6 Measured results

Table 10 Conducted emissions. 100 V, 0.37 kW model

Filter	Ferrite ring No of turns	Maximum motor Cable length (m)	Switching frequency (kHz)								
			0.667	1	2	3	4	6	8	12	16
Internal	0	3	C3	C3	C3	C3	C3	C3	C4	C4	C4
		5	C3	C3	C3	C3	C4	C4	C4	C4	C4
		7	C3	C3	C3	C4	C4	C4	C4	C4	C4
		10	C3	C3	C4	C4	C3	C3	C4	C4	C4
External	0	2	C1	C1	C1	C1	C1	C1	C1	C1	C1
		20	C2	C2	C2	C2	C2	C2	C2	C2	C2
		50	C2	C2	C2	C2	-	-	-	-	-

Table 11 Conducted emissions. 200 V, 0.75 kW model

Filter	Ferrite ring No of turns	Maximum motor Cable length (m)	Switching frequency (kHz)								
			0.667	1	2	3	4	6	8	12	16
Internal	0	2	C3	C3	C3	C3	C3	C3	C3	C3	C4
		3	C3	C3	C3	C3	C3	C3	C3	C4	C4
		5	C3	C3	C3	C3	C3	C3	C4	C4	C4
		7	C3	C3	C3	C3	C3	C3	C4	C4	C4
		10	C3	C3	C3	C3	C3	C4	C4	C4	C4
External	0	2	C1	C1	C1	C1	C1	C1	C1	C1	C1
		20	C2	C2	C2	C2	C2	C2	C2	C2	C2
		50	C2	C2	C2	C2	-	-	-	-	-

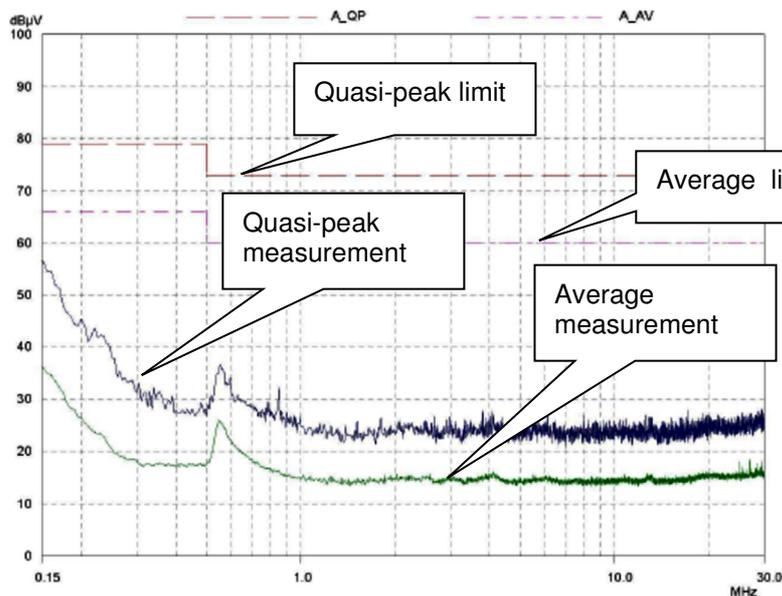


Figure 3 Conducted Emission 200 V, 0.75 kW model, 3 kHz switching frequency, 50 m cable, filter part No. 4200-1000

Notes:

1. Where the drive is incorporated into a system with rated input current exceeding 75 A, the higher emission limits in IEC 61800-3 for the Second environment are applicable, and no filter is required.
2. Operation without a filter is a practical cost-effective option in an industrial environment where existing levels of electrical noise are likely to be high, and any electrical equipment in operation has been designed for such an environment. This is in accordance with IEC 61800-3 in the Second Environment. There is some risk of disturbance to other equipment, and in

Commander C200, C300 Frame size 1 EMC Data Sheet

this case the user and supplier of the drive system must jointly take responsibility for correcting any problems that occur.

3.3.7 Operation with IT (ungrounded) supplies

	<p>Special attention is required when using internal or external EMC filters with ungrounded supplies, because in the event of a ground (earth) fault in the motor circuit the drive may not trip and the filter could be overloaded. In this case, either the filter must not be used (removed) or additional independent motor ground fault protection must be provided. For details of ground fault protection contact the supplier of the drive.</p>
---	---

Unusual hazards can occur on ungrounded supplies with more than one source, for example on ships. Contact the supplier of the drive for more information.

3.3.8 Shared external filters for multiple drives

In multiple drive applications it is preferable to use one EMC filter for each drive. Filters of appropriate current rating may be shared between drives, but deviations from the stated standards may then occur. The motor cable length limits apply to the total for all drives connected to a given filter.

3.3.9 Related product standards

The conducted emission levels specified in the standards specified above are equivalent to the levels required by the following product specific standards:

Table 12 Comparison of IEC 61800-3 and related emissions standards

Drive standard Equipment Category	Generic standard	Scope of Generic standard	Product standard	Scope of Product standard
C1	IEC 61000-6-3	Emission standard for residential, commercial and light-industrial environments	EN 55011 Class B CISPR 11 Class B	Industrial, scientific and medical equipment
			EN 55014 CISPR 14	Household electrical appliances
			EN 55022 Class B CISPR 22 Class B	Information technology equipment
C2	IEC 61000-6-4	Emission standard for industrial environments	EN 55011 Class A Group 1 CISPR 11 Class A Group 1	Industrial, scientific and medical equipment
			EN 55022 Class A CISPR 22 Class A	Information technology equipment
			EN12015 (rated current ≤ 25 A)	Lifts, elevators and moving walkways

3.4 Radiated Emissions

3.4.1 Industrial emission standard IEC 61000-6-4

When installed in a standard metal enclosure according to the wiring guidelines in section 4 of this EMC data sheet and using the standard or low-leakage mains input filters, the drive will meet the radiated emission limits required by the generic industrial emission standard IEC 61000-6-4.

3.4.2 Limits for radiated emission

Compliance was achieved in tests using representative enclosures and following the guidelines given. Every effort was made to ensure that the arrangements were robust enough to be effective despite

Commander C200, C300 Frame size 1 EMC Data Sheet

the normal variations which will occur in practical installations. However no warranty is given that installations built according to these guidelines will necessarily meet the same emission limits.

The limits for emission required by the generic emission standards are summarised in the following table:

Table 13 Radiated emissions limits in IEC 61800-3

Frequency range (MHz)	Category C1	Category C2	Category C3	Units
30 - 230	30	40	50	dB μ V/m Quasi peak
230 - 1000	37	47	60	

Note: The limits apply at a measuring distance of 10 m. The measurements may be made at 3 m with the limits increased by 10 dB.

3.4.3 Example test data

The test data is based on radiated emission measurements made on a standard steel enclosure containing a single drive. These drives have the highest emission levels in this product range. The tests were carried out in a calibrated open area test site. Details of the test arrangement are described below:

A standard enclosure was used having dimensions 1900 mm (high) \times 600 mm (wide) \times 500 mm (deep). Two ventilation grilles, both 200 mm square, were provided on the upper and lower faces of the door.

The drive was mounted onto the EMC input filter, which was fitted to the internal back-plate of the enclosure, the filter casing making electrical contact with the back-plate by the fixing screws. Standard unscreened power cables were used to connect the complete unit to the supply.

A suitably rated, standard AC induction motor was connected by 2 m of shielded cable (steel braided - type SY) and mounted externally.

The motor cable screen was clamped to the enclosure back-plate. The motor cable screen was also bonded to the motor frame.

The motor cable was interrupted by a DIN rail terminal block mounted in the enclosure and the shield pigtailed (50 mm long) were bonded to the back plate through an earthed DIN rail terminal block.

The motor cable screen was bonded to the back-plate on both sides of the DIN rail using metal clamps.

A 2 m screened control cable was connected to the drive control terminals with the screen clamped to the enclosure back-plate

A 2 m unscreened status relay cable was connected to the drive.

A 2 m screened communications cable was connected to the drive. The screen was not electrically connected to the drive or cubicle back panel.

The drive was operated at 6 Hz, with a switching frequency of 12 kHz. This is the worst-case condition for radiated emission.

No additional EMC preventative measures were taken, e.g. RFI gaskets around the cubicle doors.

The following tables summarise the results for radiated emission, showing the highest measurements over the frequency range 30 to 1000 MHz:

Commander C200, C300 Frame size 1 EMC Data Sheet

Table 14 Radiated Emission Measured Levels 110 V, 0.37 kW model

Frequency (MHz)	Polarisation H/V	Measured Level (dB μ V/m)	C2 Limit at 3 m (dB μ V/m)	Margin (dB μ V/m)
31.94	V	44.0	50	6.0
32.72	V	41.2	50	8.8
44.06	V	33.5	50	16.5
51.38	V	32.4	50	17.6
55.27	V	32.0	50	18.0

Table 15 Radiated Emission Measured Levels 200 V, 1.5 kW model

Frequency (MHz)	Polarisation H/V	Measured Level (dB μ V/m)	C2 Limit at 3 m (dB μ V/m)	Margin (dB μ V/m)
39.72	V	35.5	50	14.5
41.66	V	38.2	50	11.8
51.38	V	37.6	50	12.4
53.33	V	33.5	50	16.5
88.32	V	35.4	50	15.6
121.36	V	28.1	50	21.9

The results show that the limit for the industrial emission standard is met with a margin of at least 6 dB. The limit for IEC 61800-3 is met for equipment category C2.

3.4.4 Enclosure construction

In many installations, an enclosure has a back-plate which is used to mount variable speed drives together with the EMC filters and ancillary equipment. The motor cable should be bonded to the back-plate close to the drive before it leaves the enclosure wall. However, there is no disadvantage if the motor cable is bonded at the point of exit as well, through the normal gland fixings.

Depending on construction, the enclosure wall used for cable entry may have separate panels and could make poor electrical contact at high frequencies with the remaining structure. If the motor cable is only bonded to these surfaces and not to a back-plate, then the enclosure may provide insufficient attenuation of RF emission. It is the bonding to a common metal plate which minimises radiated emission. In the tests described, opening the cubicle door had little effect on the emission level, showing that the enclosure design is not critical.

3.4.5 Related product standards

The radiated emission levels specified in IEC 61000-6-4 are equivalent to the levels required by the following product standards:

Table 16 Related radiated emission standards

Generic standard	Product standard	
IEC 61000-6-4	CISPR 11 Class A Group 1 CISPR 11 Class A Group 1	Industrial, scientific and medical equipment
	EN55022 Class A CISPR 22 Class A	Information technology equipment
	EN 12015	Lifts, elevators and moving walkways

3.4.6 Radiated emissions test limits for lifts, elevators and moving walkways.

In all cases installation must be in accordance with the guidance in the Power Installation Guide and in this Data Sheet. The drives conform to the standard for Power Drives Systems, EN 61800-3, and the generic standard for Industrial environments EN 61000-6-4. This covers the requirements of EN 12015.

The limits for Radiated Emissions in the standard for Electromagnetic compatibility, Product family standard for lifts, escalators and moving walks, Emission, EN 12015 are the same as those in IEC 61800-3 for equipment category C2.

Commander C200, C300 Frame size 1 EMC Data Sheet

4 Installation and Wiring Guidelines

Comprehensive installation instructions for EMC compliance are published in the C200, C300 Frame 1 to 4 Power Installation Guide.

4.1 Ground (earth) connections

The grounding arrangements should be in accordance with Figure 4, which shows a single drive on a back-plate with or without an additional enclosure.

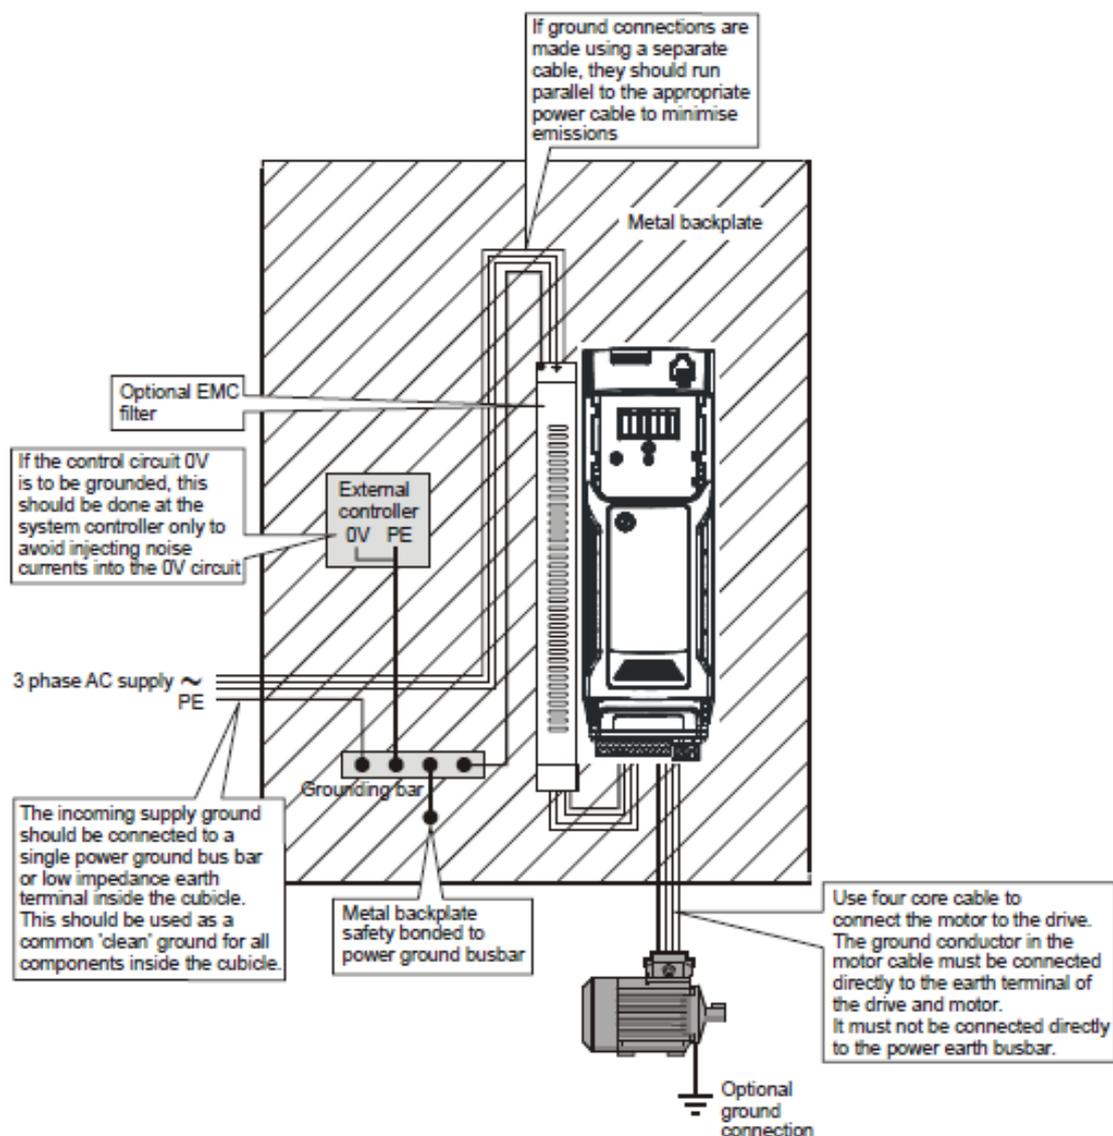


Figure 4 Wiring guidelines

A summary of the main guidelines is given below:

- The correct RFI filter must be fitted at the input to the drive.
- The limits given above regarding motor cable length and drive switching frequency for the relevant filter must be adhered to.
- Footprint filter: the drive must be correctly mounted on the filter and make good direct electrical contact with it.
- Side mounted filter: the drive and filter must be mounted together on a metal back-plate and make good electrical contact with it.

Commander C200, C300 Frame size 1 EMC Data Sheet

- The filter must be connected to the drive using the wires provided. The wires must not be extended in any way.
- The mounting surface of the filter must make good direct electrical contact with the enclosure back-plate.
- Any paint or other non-conducting surface must be removed.
- A shielded (screened) or steel wire armoured cable must be used to connect the drive to motor. The shield must be connected to the enclosure back-plate by a good high-frequency connection, for example by direct clamping using a “Ω” clamp or similar.
- Connect the shield of the motor cable to the ground terminal of the motor frame using a link that is as short as possible and not exceeding 50mm (2 in) in length. A full 360° termination of the shield to the motor terminal housing (if metal) is beneficial.
- Ensure that the cables carrying the AC supply and the ground to the filter are at least 100mm (4 in) from the drive and the motor cable.
- Avoid locating sensitive signal circuits in a zone extending 0.3m (12 in) all around the drive.
- If the control circuit 0V is to be grounded, this should preferably be done at the host controller (e.g. PLC) and not at the drive, to avoid injecting noise current into the 0V circuit. This requirement does not apply if the complete system has been built to a high standard for EMC, using a highly bonded earth arrangement which prevents differential earth noise voltages.

4.2. Special requirements

4.2.1. Control wiring leaves the enclosure

The control wiring must be carried in shielded cable (one or more cables) and the shield must be clamped to the enclosure back-plate.

4.2.2. Interruptions to the motor cable

The motor cable should ideally be a single run of shielded cable having no interruptions. It may be necessary to interrupt the cable, for example to connect the motor cable to a terminal block within the drive enclosure, or to fit an isolator switch to allow safe working on the motor. The following guidelines should be observed.

4.2.3. Terminal block within enclosure

The motor cable shields should be bonded to the back-plate using uninsulated cable-clamps which should be positioned as close as possible to the terminal block. Keep the length of power conductors to a minimum and ensure that all sensitive equipment and circuits are at least 0.3 m (12 in) away from the terminal block.

Commander C200, C300 Frame size 1 EMC Data Sheet

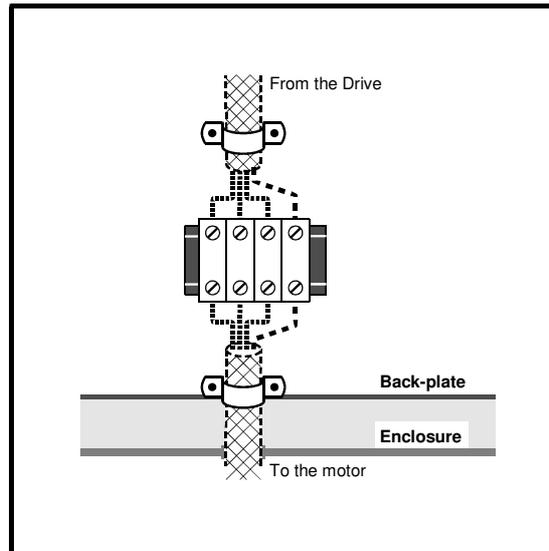


Figure 5 Arrangement for terminal block in motor cable

4.2.4. Using a motor isolator switch

The motor cable shields should be connected by a very short conductor having a low inductance. The use of a flat metal bar is recommended; conventional wire is not suitable. The shields should be bonded directly to the coupling bar using uninsulated metal cable-clamps. Keep the length of the power conductors to a minimum and ensure that all sensitive equipment and circuits are at least 0.3m (12in) away. The coupling bar may be grounded to a known low impedance ground nearby, for example a large metallic structure which is connected closely to the Drive ground.

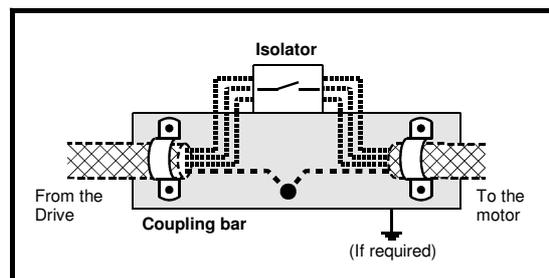


Figure 6 Arrangement for isolator switch in motor cable