


**Programmable Precision Reference**
**MMTL431**
**Features:**

- Programmable output Voltage to 36 V
- Low dynamic output impedance
- Sink current capability of 1 to 100 mA
- Low output noise voltage
- Fast turn on response



1. Reference 2.Cathode 3. Anode

**Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ , unless otherwise noted.)**

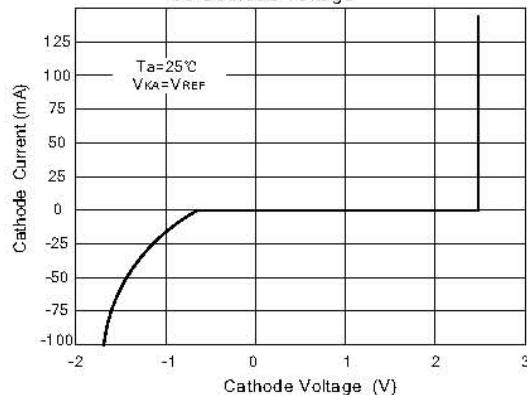
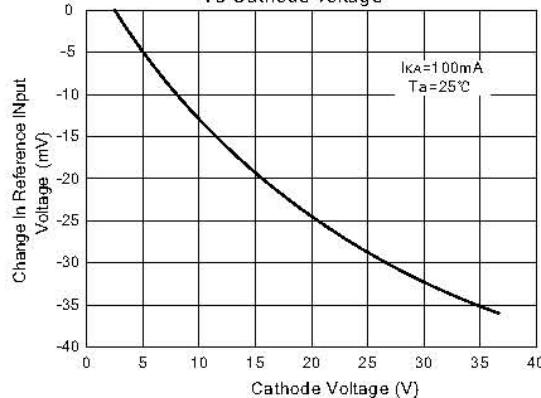
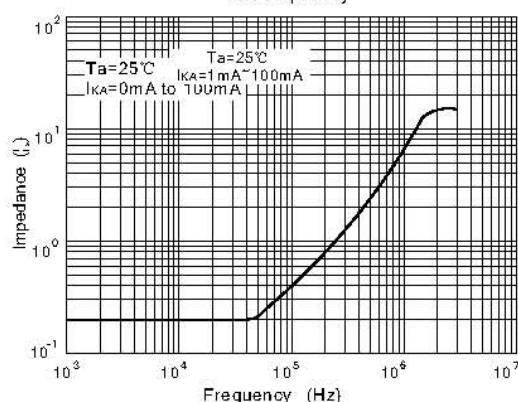
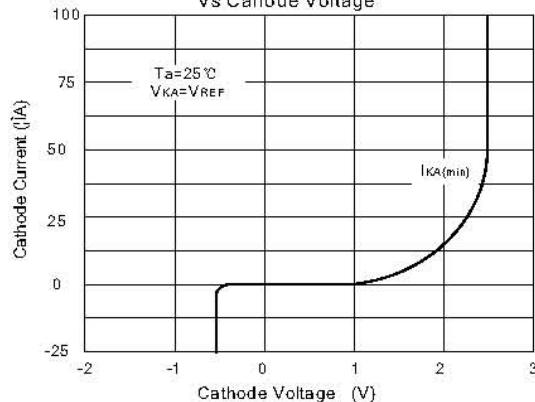
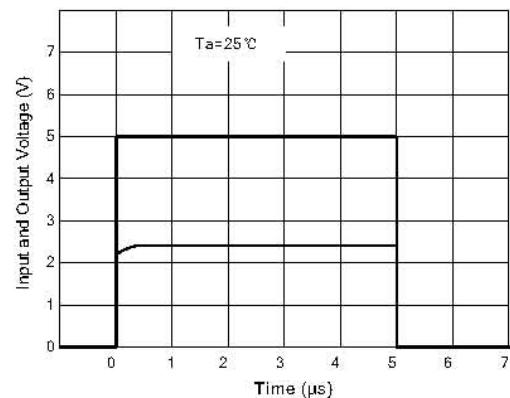
| Parameter                          | Symbol    | Value          | Unit |
|------------------------------------|-----------|----------------|------|
| Cathode Voltage                    | $V_{KA}$  | 36             | V    |
| Cathode Current Range (Continuous) | $I_{KA}$  | - 100 to + 150 | mA   |
| Reference Input Current Range      | $I_{REF}$ | - 0.05 to + 10 | mA   |
| Power Dissipation                  | $P_D$     | 350            | mW   |
| Operating Temperature Range        | $T_{opr}$ | - 25 to + 85   | °C   |
| Junction Temperature               | $T_j$     | 150            | °C   |
| Storage Temperature Range          | $T_{stg}$ | - 65 to + 150  | °C   |

**Recommended Operating Conditions**

| Parameter       | Symbol   | Min.      | Max. | Unit |
|-----------------|----------|-----------|------|------|
| Cathode Voltage | $V_{KA}$ | $V_{REF}$ | 36   | V    |
| Cathode Current | $I_{KA}$ | 1         | 100  | mA   |

**Characteristics at  $T_a = 25^\circ\text{C}$** 

| Parameter  | Symbol                         | Min.         | Typ.           | Max.         | Unit |
|--|--------------------------------|--------------|----------------|--------------|------|
| Reference Input Voltage<br>at $V_{KA} = V_{REF}$ , $I_{KA} = 10 \text{ mA}$<br>MMTL431<br>MMTL431A   | $V_{REF}$                      | 2.44<br>2.48 | 2.495<br>2.495 | 2.55<br>2.51 | V    |
| Deviation of Reference Input Voltage Over Temperature<br>at $V_{KA} = V_{REF}$ , $I_{KA} = 10 \text{ mA}$ , $- 25^\circ\text{C} \leq T_a \leq + 85^\circ\text{C}$  | $\Delta V_{REF}/\Delta T$      | -            | 4.5            | 17           | mV   |
| Ratio of Change in Reference Input Voltage to the Change<br>in Cathode Voltage<br>at $I_{KA} = 10 \text{ mA}$<br>$\Delta V_{KA} = 10 \text{ V to } V_{REF}$<br>$\Delta V_{KA} = 36 \text{ V to } 10 \text{ V}$ | $\Delta V_{REF}/\Delta V_{KA}$ | -<br>-       | -1.0<br>-0.5   | -2.7<br>-2   | mV/V |
| Reference Input Current<br>at $I_{KA} = 10 \text{ mA}$ , $R1 = 10 \text{ K}\Omega$ , $R2 = \infty$   | $I_{REF}$                      | -            | 1.5            | 4            | μA   |
| Deviation of Reference Input Current Over Full Temperature<br>at $I_{KA} = 10 \text{ mA}$ , $R1 = 10 \text{ K}\Omega$ , $R2 = \infty$ , $- 25^\circ\text{C} \leq T_a \leq + 85^\circ\text{C}$                  | $\Delta I_{REF}/\Delta T$      | -            | 0.4            | 1.2          | μA   |
| Minimum Cathode Current for Regulation<br>at $V_{KA} = V_{REF}$  | $I_{KA(\min)}$                 | -            | 0.45           | 1            | mA   |
| Off-Stage Cathode Current<br>at $V_{KA} = 36 \text{ V}$ , $V_{REF} = 0$  | $I_{KA(OFF)}$                  | -            | 0.05           | 1            | μA   |
| Dynamic Impedance<br>at $V_{KA} = V_{REF}$ , $I_{KA} = 1 \text{ to } 100 \text{ mA}$ , $f \leq 1 \text{ KHz}$  | $Z_{KA}$                       | -            | 0.15           | 0.5          | Ω    |

**MMTL431****Fig 1 Cathode Current Vs Cathode Voltage****Fig 3 Change in Reference Input Voltage Vs Cathode voltage****Fig 5 Dynamic Impedance Vs Frequency****Fig 2 Cathode Current Vs Cahode Voltage****Fig 4 Pulse Response****Fig 6 Small Signal Voltage Amplification Vs Frequency**