



EMI SUPPRESSORS 電磁干擾抑制器

RH SERIES

FEATURES 特征

Use of high loss ferrite. Available in a wide range of values and configurations to suit most application.
採用高損耗鐵氧體，有各種規格及尺寸，用於不同領域。

APPLICATIONS 用途


Waveform correction of digital signals from digital equipment and absorption of high-frequency noise from data lines.
糾正數字設備中的數字信號，抑制高頻噪音。

PRODUCT IDENTIFICATION

RH 3520 - 10 - R - LF
(1) (2) (3) (4) (5)

- (1) .Series name (產品品名) (2) .Dimensions (產品尺寸) (3) .Inside diameter (孔徑)
(4) .Packing code (包裝) R:卷裝 B:散裝 (5) .Lead free (環保標識)

SHAPES AND DIMENSIONS (Unit:mm)

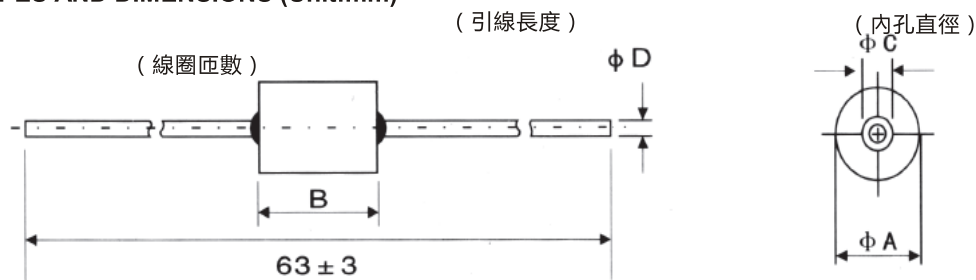

Part No.	Impedance Z (Ω) at 100MHz typ.	DIMENSIONS(mm)			
		φA	B	φC	φD(wire dia.)
RH3530-10	40-48	3.5±0.2	3.0±0.2	1.0±0.10	0.60
RH3530-13	24-40	3.5±0.2	3.0±0.2	1.3±0.15	0.60
RH3545-09	60-70	3.5±0.2	4.5±0.2	0.9±0.1	0.60
RH3545-10	56-68	3.5±0.2	4.5±0.2	1.0±0.1	0.60
RH3550-10	58-72	3.5±0.2	5.0±0.3	1.0±0.1	0.60
RH3550-13	28-56	3.5±0.2	5.0±0.3	1.3±0.15	0.60
RH3560-08	82-92	3.5±0.2	6.0±0.3	0.8±0.1	0.60
RH3560-10	78-86	3.5±0.2	6.0±0.3	1.0±0.1	0.60
RH3560-13	56-66	3.5±0.2	6.0±0.3	1.3±0.15	0.60
RH3580-10	88-118	3.5±0.2	8.0±0.3	1.0±0.1	0.60
RH3590-10	95-18	3.5±0.2	9.0±0.3	1.0±0.1	0.60
RH3540-10	56-62	4.0±0.2	4.0±0.2	1.0±0.1	0.60
RH3560-10	80-85	4.0±0.2	6.0±0.3	1.0±0.1	0.60
RH3580-10	100-110	4.0±0.2	8.0±0.3	1.0±0.1	0.60
RH35A0-10	120-138	4.0±0.2	10.0±0.3	1.0±0.1	0.60

TEST INSTRUMENT:HP-4191A or HP-4395A

※Design as Customer's Requested Specifications. (可按顧客的特殊需求設計)