


JOINING



iK8 Carry-on KTV


Model: JSP102

MANUAL

Please read the user manual carefully before use, follow the instructions of this manual to operate. Such product technology or software upgrade without notice.

-1-

Product Function

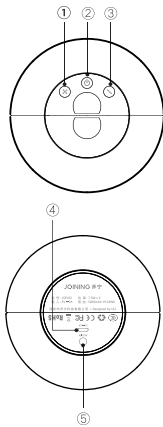

Product main-controller

① Volume control+: Short press next songs. Press and hold the volume continuously increase. In the meanwhile, The ringtones available when the volume biggest.

② Power control: long press on/off, start with voice prompt, on/off key white light flashes, VOL +/- key, The blue LED is always on, there is a tone when the power is off; short press to play/pause

Bluetooth device name: iK8

- Boot back: boot back to the last device paired, the white light is powered on.
- Pairing: If you have not connected back to the last device you have paired in about 5 seconds, turn on the new device and the blue light will flash.
- Successful connection: When the Bluetooth connection is successful, there is a voice prompt, and the white light is always on.
- Disconnect: When the device is disconnected from Bluetooth, there is a voice prompt and the on/off key white light is shining.

③ Volume Control-: Short press next songs. Press and hold the volume continuously to mute.

④ Charging Port: Micro USB


⑤ 4-pole interface: Aux in input

* Aux in input priorities.

Product connection

一. Bluetooth Aux in Connection

- Bluetooth connection: Power on: Open Bluetooth function of mobile Find iK8 Bluetooth to connect



- Aux in connection: Plug the 4-pole Aux in Aux in interface at the bottom of the product



二. Microphone connection


① Press the desired mode and volume

Charging the unit

② Press the desired mode and volume



Product Packing list



- ① iK8 main-controller x 1Pcs
- ② 2. Microphone x1Pcs,
 - Power Supply cable 0.8M x 1Pcs,
 - Audio Cable 3.5 4 level audio cable 1.0m x 1Pcs.
 - Instruction warranty card
 - Qualification card x1Pcs.

-3-

Basic parameters

Speaker	
Model	JSP102
Speaker	53mm , 4Ω , 8W x 2
Power	7.5W x 2 (RMS)
Distortion	≤1%
SNR	≥65dB
Frequency Response	100Hz-18KHz
Input	5V = 2.0A
Combined Size	Φ110mm x H132mm
Product Extended Size	605mm

Dynamic microphone	
Output impedance	600Ω (± 15%)
Sensitivity	-54 (± 3) dB (at 1KHz) (0dB=1V/Pa)
Frequency response	70Hz~15KHz
Directivity	Uni-directivity
Input	5V = 500mA
Product Size	Φ76mm x 150mm

-2-

Product Features

Carry-on 30m2 KTV room

Constant sound field, Create large music space, Immersive singing, wireless connection

Shocking sound quality, the best companion for mobile games, The tune lingered in the room

Up to RMS 15W no distortion with professional audio frequency level

Unique desing, high power, listening and singing with your heart, Warm and intimate, easy to carry

Precision sound reproduction, HiFi level stereo music playback Multivariant style, Lovely and Cute music companion

Up to 10 hours wireless play


Professional op-amp IC, Professional loudspeaker box Design

Adopt audio-frequency waveguide low frequency extension technology

2 Inch high fidelity NdFeB magnet speaker unit

Ultra low power bluetooth 4.2 version chip

Microphone



⑥ Volume control: Push up microphone to set volume to Maximum and push down to set volume to minimum (Microphone volume is set to 50% minimum)

⑦ Mode function: short press switch mode, there are three modes

- Reverb 1 (professional) - blue light
- Reverb 2 (KTV) - Orange light
- Original sound mode - green light (power on default reverb 1 mode)

⑧ Charging interface: Micro USB

⑨ Power switch: press to power on, pop up power off

* The microphone is automatically connected to the host

-4-

JOINING

Shenzhen Joining Free Technology Co., Ltd.

Designed by ULL

Tel : +86 400-900-9522 , +86 755 2328 1320 (9:00-18:00 Monday to Friday)

Website: www.joiningfree.com Email: marketing@joiningfree.com

Add: 16 F, Block C, Qifengda Building, Taohuayuan Technology Park, Furong Road, Songgang, Baoan District, Shenzhen, China, 518105

-5-

Product performance fault table

Name	Performance failure	Method of exclusion
iK8 Carry-on KTV host	No voice	1. If powered 2. Voice UP
	No Bluetooth Signal	1. If powered 2. Speaker connected other phone
	No Charging	1. If the charging red indicator light on 2. If the adapter connected correctly?
Microphone	Microphone no voice	Whether turned on the microphone power
	No reverberation	Press the microphone M button to switch the reverb mode
	Microphone sound is low	Adjust the microphone volume to the maximum

-6-

NOTE

Shenzhen Joining Free Technology Co., Ltd. provides 12 months of quality assurance from the date of receipt of the product you bought from retailer or dealer. If the product(s) occur failure by nonhuman damage, please email to Shenzhen Joining Free Technology Co., Ltd. aftersale service support center(marketing@joiningfree.com) immediately to apply for Quality Assurance Statement. We will contact and guide you how to return failed product(s) to Shenzhen Joining Free Technology Co., Ltd. company or retailer/dealer for repair or replacement.

Contac

Tel: 400-900-9522 +86 755 23281320(9:00-18:00 Monday to Friday)
Email: marketing@joiningfree.com
Website: www.joiningfree.com

Statement

Our after-sale service are limited to products sold from Shenzhen Joining Free Technology Co., Ltd. official stores or authorized retailers/agents. If you purchased iK8 Carry-on KTV from other channels, you need to check the authenticity of the product by visit Shenzhen Joining Free Technology Co., Ltd. official website or through scan the anti-counterfeit QR code on the product packaging.

-8-

Environmental protection and RoHS Standard
Free from mercury or environmentally harmful substances
Executive standard: GB8898-2011



Precautions



Use proper voltage and current 5V/1A(2A Max) to charge, Unplug when not in use



Keep the surrounding air convection for heat dissipation while product is working



Do not touch the electrical parts with wet hands



Avoid liquid influe into the product to prevent product failure or damage



Do not repair or disassemble the product without authorization



Do not use this product in a humid environment or near a heat source



Please do not use worn or damaged power cord, avoid circuit overload to prevent electric shock or fire



When the battery is low, the speaker will sound charging prompt tone every few seconds to remind you to charge in time

-7-

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- (2) Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

-9-



Website



Wechat

Thank you for purchasing our iK8 Carry-on KTV, Please read this manual carefully and keep it safe for future reference. If you need any assistance, Please contact our customer service team by email: marketing@joiningfree.com