


註：1.Flatness on the forcer installation interface is recommended to be within 0.02/300mm.

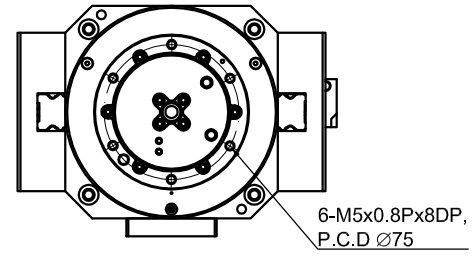

StageType	LMTC4+TMN42E-100	
Motor Type	LMTC4	TMN42E
Stroke	100 mm	N/A
Repeatability	2 µm (with HIWIN solution)	±2.5 arc-sec
Max acceleration	20 m/s ²	N/A
Max velocity	1.0m/s	700 rpm
Encoder	Renishaw RGH41B, Analog 1Vpp	
Drive type	HIWIN D1	

ROUGH % 8.0a ∇	FIT % 3.2a ∇∇	GRD 0.8a ∇∇∇	SCALE 1:X	TYPE LM ROBOT	DATE Jan.22.16					
TOLERANCE mm				CUSTOMER HIWIN	DRN 黃聖勳					
UP TO	6	30	120	300	600	1200	2400	2400	MATERIAL	CHK 范智凱
	±0.1	±0.2	±0.3	±0.4	±0.5	±0.8	±1.0	±1.5	PART NO FM18M15602	APPD 張宇樂
HIWIN® MIKROSYSTEM CORP.				NAME APPROVAL	DWG NO M15602	A1	SHEET 1-1			

ITEM	DATE	MODIFIED	DESCRIPTION	APPD