


DUPLEX SILENT CHAIN

Duplex chain is designed to drive sprockets from either surface of the chain. It is most useful when multiple sprockets must be driven. Targeting your specific duplex drive, consult TYC for recommendations and assemblies.

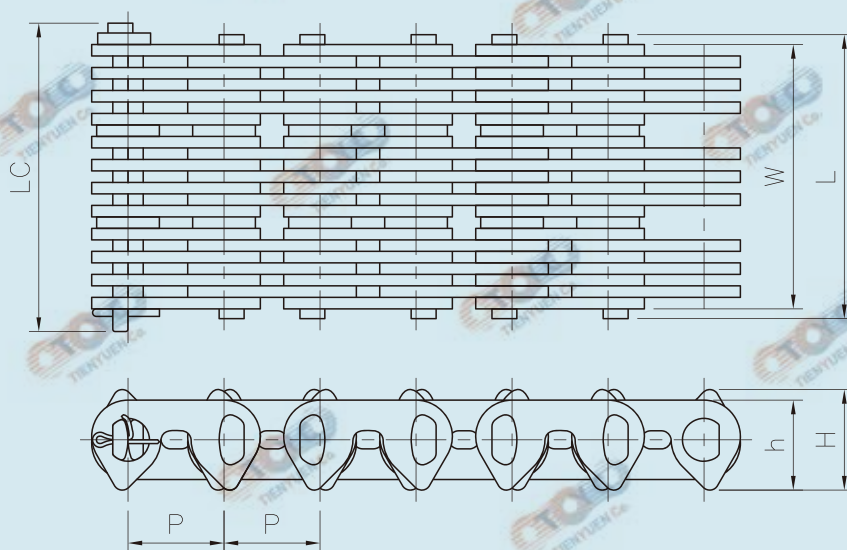

Chain No.	Pitch		Lacing	Nominal Width		Total Height	Height	Width Over Links	Rivet Pin Length	Connecting Pin Length	Avg. Ulti. Tensile Strength	Approx. Weight
	P			H	h	W	L	LC				
	inch	mm		inch	mm	mm	mm	mm	mm	mm	kgf	kg / m
DSC404	1/2	12.70	4-5-4	1	25	13.3	11.9	24.0	27.0	28.5	3,500	1.49
DSC406			7-7-7	1-1/2	40			37.0	40.0	41.5	5,250	2.09
DSC408			7-15-7	2	50			50.0	53.0	54.5	7,000	2.37
DSC412			11-23-11	3	75			75.5	78.5	80.0	10,500	3.63
DSC416			15-31-15	4	100			101.0	104.0	105.5	14,000	4.62
DSC420			9-19-19-19-9	5	125			126.5	129.5	131.5	17,500	5.66
DSC424			15-23-15-23-15	6	150			152.0	155.0	157.0	21,000	6.70

Other chain widths are also available upon request

