


# NON-STANDARD CHAIN

These are ISO base chains with modified dimensions to reach higher tensile strength for demanding applications.

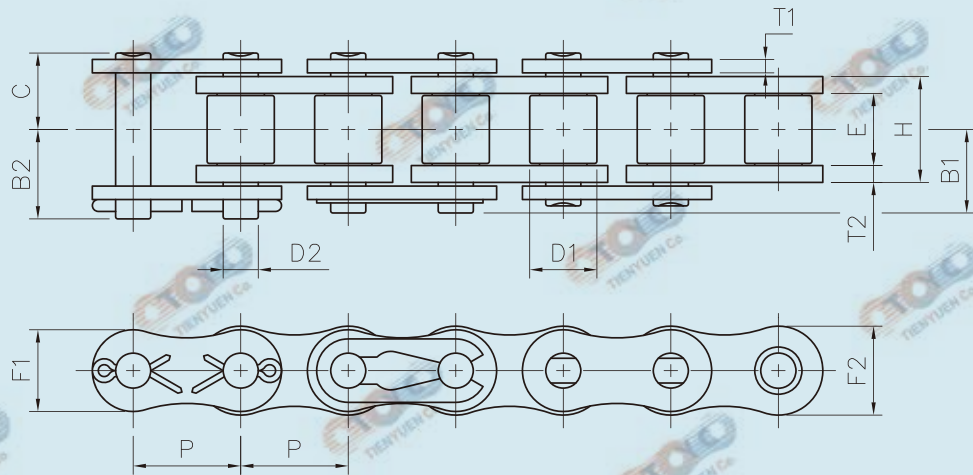

Chain No.	Pitch x Width	Roller	Pin				Link					Avg. Ulti. Tensile Strength kgf	Approx. Weight kg / m
	P x E mm	D1 mm	C mm	B1 mm	B2 mm	D2 mm	T1 mm	T2 mm	H mm	F1 mm	F2 mm		
12RA	19.05 x 11.68	12.07	12.50	14.72	14.72	6.10	2.5	2.5	17.23	16.80	16.80	4,500	1.53
R12BH	19.05 x 13.50	12.07	13.40	18.40	-	5.72	2.4	2.4	19.00	16.10	16.10	4,000	1.52
16R	25.40 x 17.02	15.88	17.85	19.55	20.95	8.90	3.1	3.9	25.40	23.15	23.15	9,500	3.11