

Typical Features


- ◆ Wide input voltage range (90-265VAC) 120-370VDC
- ◆ Transfer efficiency 82%(Typ.)
- ◆ Switching Frequency: 65KHz(Typ.)
- ◆ Protection: Over current, short circuit
- ◆ Isolation:3000VAC
- ◆ PCB mounting
- ◆ Plastic case shielded,meet UL94V-0



Application Field

UA10-220SXXP2D Series-----a compact size, high efficient, conform to CE power converter offered by Aipu. It features universal input voltage range, taking both DC and AC input, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, safer isolation, with good EMC performance. EMC and Safety specification meet international EN55032、IEC/EN61000 standard. It is widely used in power, industrial, instrument, smart home applications. Please refer to this datasheet when module being used in a bad EMC environment.

Product Named Method

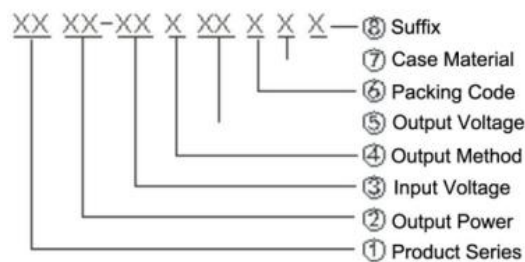

Typical Product List

Part No.	Input voltage range	Output voltage/current				Max. Capacitive Load	Ripple & Noise 20MHz	Efficiency @full load , nominal input voltage (TYP)
		Vo1(V)	Io1(mA)	Vo2(V)	Io2(mA)			
UA10-220S12P2D	90-265VAC 120-370VDC	12	833	-	-	5000	150	82

Note 1: Due to space limitations, above is only a part of our product list, please contact our sales team for more items;

Note 2: "" are models under developing.

Note 3: The lowest efficiency is -2% of typical value due to instrument tolerance of test equipment.

Note 4: Output Efficiency(Typ.) is based on that product is full loaded and burned-in after half an hour;

Technology Parameter

Test Condition: Unless otherwise specified, data in the datasheet should be tested under the conditions of inputting nominal voltage, pure resistance rated load and Ta=25°C.

Input Specifications	Min	Typ.	Max	Typ.
Input voltage(Vac)	90Vac(127Vdc)	220Vac	265Vac (380Vdc)	-
Input Frequency range(Hz)	47	50	63	
Standby power consumption	0.2 W (MAX)			
Input current	0.18A (MAX) @Vin=100Vac		0.12A(MAX) @Vin=220Vac	
Surge current	10A (MAX) @Vin=100Vac		20A (MAX) @Vin=220Vac	

Output Specifications

Voltage Accuracy	Vo1±2.0%			
Line Regulation	Nominal load,full input voltage range	Vo1		±0.2%
Load Regulation	20% ~ 100% Nominal load	Vo1		±0.5%
Minimum Load	Single Output			0%Load
Ripple & Noise	20MHz BM(full load)			
	Vo≤5.0V, ≤80mVp-p	Vo≥48V, ≤180mVp-p	Other≤150 mVp-p	
Turn-on Delay Time	Nominal input voltage, full load	≤4000mS		
Power-off Holding Time	Nominal input voltage, full load	80ms(typ)		
Output Dynamic Characteristics	25%~50%~25% 50%~75%~50%	Overshoot range (%) : ≤±5%; Recovery time(mS) ≤5.0mS:		
Output Short Circuit Protection	Continuous, Self-recovery	Output Switched off	Hiccup	
Output Over load/current Protection	>130%Po/Io	Output Switched off	Hiccup	


General Specifications

Transfer Efficiency	Nominal input voltage, full load	-	82%(typ.)
Switching Frequency	-	jitter	65KHz(typ.)
Operating Temperature	The operating temperature range should refer to the temperature derating curve		-25°C ~ +65°C
Temperature Drift	-	-	0.03%/°C
Storage Temperature	-	-	-40°C ~ +105°C
Max Case Temperature	-	-	+95°C
Relative Humidity	-	-	10%~90%
Isolation Voltage	Input to Output 3000Vac ≤ 5.0mA/1min;		
MTBF	>300,000H @25°C		

EMC Character

EMI	CE	CISPR22/EN55022, CLASS B (bare board)	
	RE	CISPR22/EN55022, CLASS B (bare board)	
EMC	ESD	IEC/EN61000-4-2	±6KV/8KV (bare board) Perf.Criteria B
	RS	IEC/EN61000-4-3	10V/m Perf.Criteria A
	EFT	IEC/EN61000-4-4	±1KV(bare board) Perf.Criteria B
		IEC/EN61000-4-4	±2KV (See photo 1 recommended circuit) Perf.Criteria B
	Surge	IEC/EN61000-4-5	±1KV(bare board) Perf.Criteria B
		IEC/EN61000-4-5	±2KV (See photo 1 recommended circuit) Perf.Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s Perf.Criteria A
	PFMF	IEC/EN61000-4-8	10A/m Perf.Criteria A
Voltage dips, short interruptions and voltage variations immunity		IEC/EN61000-4-11	0%-70% Perf.Criteria B

Packing Dimension

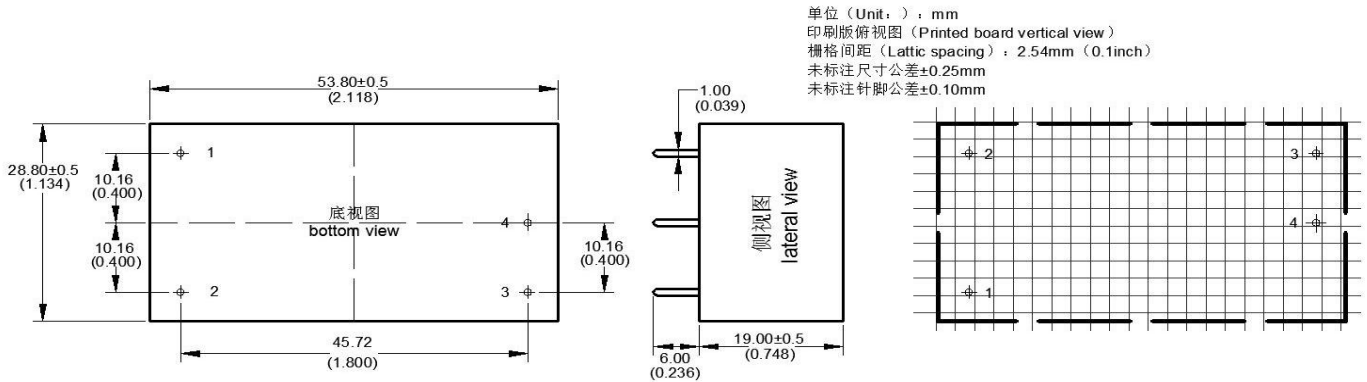

Packing Code	L x W x H	
P2	53.8X28.8X19.0mm	2.118X1.134X0.748inch

Pin Definition

Pin-Out	1	2	3	4
Single (S)	AC(N)	AC(L)	+Vo	-Vo


Note: If the definition of pin not is in accordance with the model selection manual, please refer to the label on actual item.

Ripple & Noise Test: (Twisted Pair Method 20MHZ bandwidth)

Test Method:


(1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 47uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.

(2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

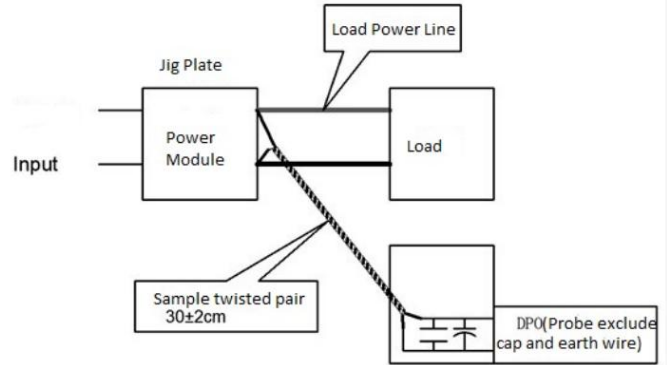


Product Characteristic Curve

Temperature derating curve

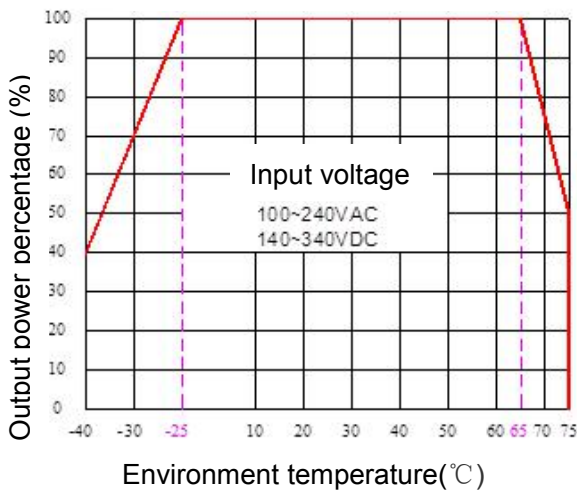

Input voltage derating curve

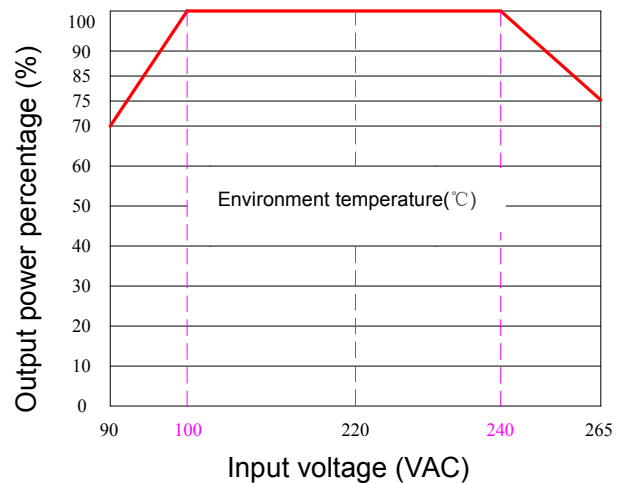


Note 1: Input voltage should be derated based on input voltage derating curve when it is 90~100VAC/ 240~265VAC/ 120~140VDC/340~370VDC

Note 2: This product is suitable to use in natural air cooling environments, if in a closed environment, please contact with us.

Typical Application Circuit

1、EMC recommended parameters and Application Circuit

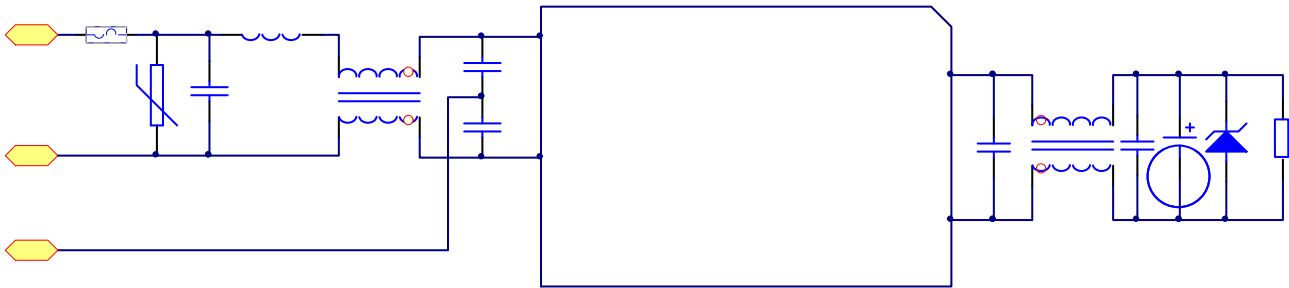

(Photo 1: EMC recommended circuit)

Part no:	C3(uF)	TVS
UA10-220S12P2D	220	SMBJ20A

Note 1:

Output filtering capacitor C3 are electrolytic capacitors, recommended to use high frequency low resistance ones, capacitance and output current please refer to the technical specifications provided by the manufacturers; withstand capacitance C3 voltage derating should be 80% or above; capacitor C1,C2 are ceramic capacitor, remove the high frequency noise, recommend 0.1uF/50V/1206; TVS is a recommended component to protect post-circuits (if converter fails);

Component	Component Recommended Value
FUSE	3.15A/250Vac,slow fusing, necessary to external
MOV	14D471K
CX1	0.22uF/275Vac
L1	2.5uH/2.5A
L2	15mH/2.5A T12X7X6mm
CY1	102M-400Vac
CY2	
L3	T13X8,145uH
RL	Customer terminal load (end product)

Note 2:

1. The product should be used within the specification range, or it will cause permanent damage to it;
2. The input terminal should connect to fuse;
3. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- 4.If the product worked beyond the load range, we cannot ensure that the performance of product is in accordance with all the indexes in this manual;
5. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75% with nominal input voltage and rated output load(pure resistance load);
6. All index testing methods in this datasheet are based on our Company's corporate standards;
- 7.The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, please directly contact our technician for specific information;
8. We can provide product customization service;
9. The datasheet is subject to change without prior notice.