



Typical Features

- ◆Wide input voltage range:85-265VAC/120-380VDC
- ◆No load power consumption≤0.5W
- ◆Typical transfer efficiency 84%
- ◆Switching frequency:65KHz
- ◆Protection: Over current / Short circuit
- ◆Isolation Voltage:4000VAC
- ◆Meet IEC60950/UL60950/EN60950
- ◆Pass the test of LPS(Limit Power Supply)
- ◆6 sided shielding plastic case, meet UL94 V-0
- ◆PCB mounting



Application Field

UA10-220SXXP2 Series----- a compact size, high efficient ,conform to CE standard power converter offered by Aipu.

It features universal input voltage range, DC and AC dual-use, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, safer isolation, safe and reliable, with good EMC performance, meet EN55032, IEC/EN61000 standard.

It widely used in power, industrial, instrument and smart home applications.

For harsh EMC environment, the application circuit in the datasheet is strongly recommended.

Typical Product List

| Certificate | Part No | Output Specifications | | | | | Max. Capacitive Load | Ripple& Noise 20MHz (MAX) | Efficiency @Full load,220Vac (Typical) |
|-------------|----------------|-----------------------|----------|----------|----------|----------|----------------------|---------------------------|--|
| | | Power | Voltage1 | Current1 | Voltage2 | Current2 | | | |
| | | (W) | Vo1(V) | Io1(m A) | Vo2(V) | Io2(m A) | | | |
| CE ROHS | UA10-220S05P2 | 10 | +5.0 | 2000 | -- | -- | 2000 | 80 | 77% |
| / | *UA10-220S09P2 | 10 | +9.0 | 1111 | -- | -- | 1000 | 120 | 80% |
| CE ROHS | UA10-220S12P2 | 10 | +12 | 834 | -- | -- | 680 | 120 | 81% |
| / | *UA10-220S15P2 | 10 | +15 | 667 | -- | -- | 470 | 120 | 82% |
| Applying | UA10-220S24P2 | 10 | +24 | 417 | | | 330 | 120 | 84% |

Note 1: Due to space limitations, above is only a part of our product list, please contact our sales team for more items.

Note 2: "*" are models being developing.

Note 3:The typical value of output efficiency is based on full load and burn-in after half an hour.

Note 4: The fluctuation range of full load efficiency at table(% ,TYP) is ±2%, full load efficiency = total output power/module's input power.

Input Specifications

| Items | Operating Condition | Min | Typ. | Max | Unit |
|---------------------|---------------------|-----|------|-----|------|
| Input Voltage Range | AC | 85 | 220 | 265 | VAC |

| | | | | | |
|---------------------------------|--------------|-----------------------------|------|------|-----|
| | DC | 120 | 310 | 380 | VDC |
| Input Frequency Range | - | 47 | 50 | 63 | Hz |
| Input Current | 100VAC | - | - | 0.24 | A |
| | 220VAC | - | - | 0.15 | |
| Surge Current | 100VAC | - | - | 10 | |
| | 220VAC | - | / | 20 | |
| No Load Power Consumption | Input 115VAC | - | 0.30 | 0.50 | W |
| | Input 230VAC | - | | | |
| Leakage Current | - | 0.5mA TYP/230VAC/50Hz | | | |
| External fuse recommended value | - | 3.15A-5A/250VAC slow-fusing | | | |
| Hot Plug | - | Un-available | | | |
| Remote Control Terminal | - | Un-available | | | |

Output Specifications

| Items | Operating Condition | | Min | Typ. | Max | Unit |
|--------------------|--------------------------------------|-----|-----|------|------|------|
| Voltage Accuracy | Full input voltage range, any load | Vo1 | - | ±1.0 | ±2.0 | % |
| | | Vo2 | - | - | - | % |
| Line Regulation | Nominal Load | Vo1 | - | - | ±0.5 | % |
| | | Vo2 | - | - | - | % |
| Load Regulation | Nominal input voltage, 20%~100% Load | Vo1 | - | - | ±1.0 | % |
| | | Vo2 | - | - | - | % |
| Minimum Load | Single Output | | 5 | - | - | % |
| | Dual output common ground | | - | - | - | % |
| | Dual output isolated | | - | - | - | |
| Turn-on delay time | Input 115VAC(full load) | | - | 800 | - | mS |
| | Input 220VAC(full load) | | - | | - | |
| Holding Time | Input 115VAC(full load) | | - | 14 | - | mS |



| | | | | | |
|--------------------------|--|-----------------------------------|--------------|-----|--------|
| | Input 220VAC(full load) | - | 70 | - | |
| Dynamic Response | 25%~50%~25% 50%~75%~50% | Overshoot range(%): $\leq\pm 5.0$ | | | % |
| | | Recovery time(mS) ≤ 5.0 | | | mS |
| Output Overshoot | Full input voltage range | $\leq 10\%V_o$ | | | % |
| Short Circuit Protection | | Continuous, self-recovery | | | Hiccup |
| Drift Coefficient | - | - | $\pm 0.03\%$ | - | %/°C |
| Over Current Protection | Input 100-265VAC | $\geq 130\% I_o$ self-recovery | | | Hiccup |
| Over Voltage Protection | Output 5.0VDC | ≤ 10 | | | VDC |
| | Output 12VDC | ≤ 18 | | | |
| | Output 15VDC | ≤ 20 | | | |
| | Output 24VDC | ≤ 30 | | | |
| Ripple& Noise | - | - | 80 | 120 | mV |
| | Note: Ripple & Noise is tested by twisted pair method, for details please see(Ripple& Noise Test) at back. | | | | |

General Specifications

| Items | Operating Condition | Min | Typ. | Max | Unit |
|-----------------------|--|------------------------------------|------|-----|------|
| Switching Frequency | - | - | 65 | - | KHz |
| Operating Temperature | - | -40 | - | +75 | °C |
| | Need to derate base on temperature derating curve, please see product characteristics curve at back. | | | | |
| Storage Temperature | - | -40 | - | +85 | |
| Soldering Temperature | Wave-soldering | 260 \pm 4°C, timing 5-10S | | | |
| | Manual-soldering | 360 \pm 8°C, timing 4-7S | | | |
| Relative Humidity | - | 10 | - | 90 | %RH |
| Isolation Voltage | Input-Output Test 1min, leakage current $\leq 5mA$ | 4000 | - | - | VAC |
| Insulation Resistor | Input-Output@ DC500V | 100 | - | - | MΩ |
| Safety Standard | - | EN60950, IEC60950 | | | |
| Vibration | - | 10-55Hz, 10G, 30Min, along X, Y, Z | | | |
| Safety Class | - | CLASS II | | | |



| | | |
|------------------------|---|------------------------------|
| Class of Case Material | - | UL94V-0 |
| MTBF | - | MIL-HDBK-217F@25°C >300,000H |


Physical Characteristics

| | | |
|-------------------|---|--------------------|
| Case Material | Black flame-retardant heat-resistant plastic(UL94V-0) | |
| Packing Dimension | Horizontal package | 53.6X 28.8X19.0 mm |
| Product Weight | | 50g(TYP) |
| Cooling Method | Free air convection | |

EMC Characteristics

| Total Item | Sub Item | Test Standard | Class |
|------------|---|------------------|--|
| EMI | CE | CISPR22/EN55022 | CLASS A (bare board) CLASS B (recommend circuit see photo 1) |
| | RE | CISPR22/EN55022 | CLASS A(bare board) CLASS B(recommend circuit see photo 1) |
| EMS | RS | IEC/EN61000-4-3 | 10V/m Perf.Criteria B (recommend circuit see photo 1) |
| | CS | IEC/EN61000-4-6 | 3Vr.m.s Perf.Criteria B (recommend circuit see photo 1) |
| | ESD | IEC/EN61000-4-2 | Contact ±6KV / Air ±8KV Perf.Criteria B |
| | Surge | IEC/EN61000-4-5 | ±1KV Perf.Criteria B (bare board) ±2KV Perf.Criteria B(recommend circuit see photo 1) |
| | EFT | IEC/EN61000-4-4 | ±2KV Perf.Criteria B(recommend circuit see photo 1) |
| | Voltage dips, short interruptions and voltage variations immunity | IEC/EN61000-4-11 | 0%~70% Perf.Criteria B |

Dimension

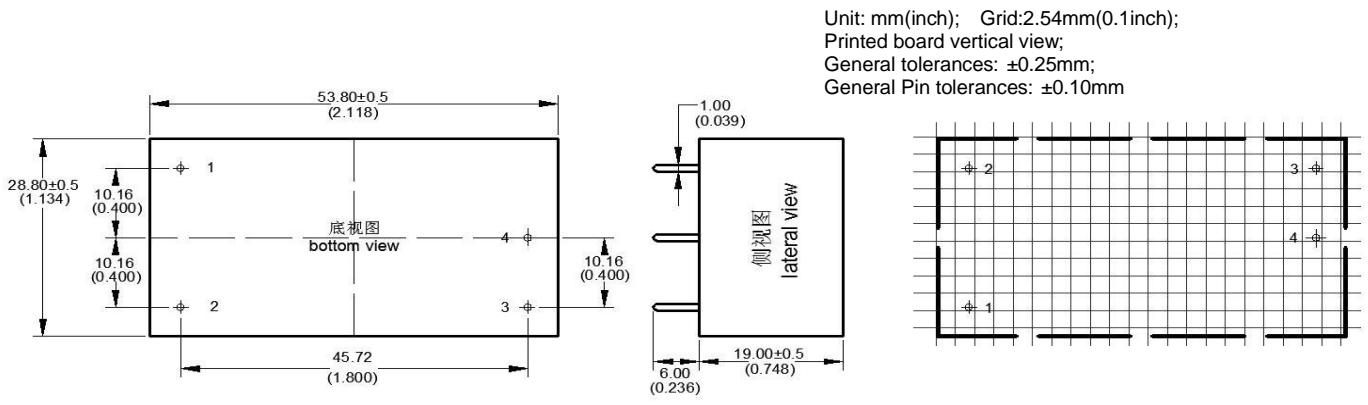



| | | |
|--------------|--------------------|------------------------|
| Packing Code | L x W x H | |
| P2 | 53.6X 28.8X19.0 mm | 2.118X1.134X0.0748inch |

Pin Definition

| | | | | |
|-----------|-------|-------|-----|-----|
| Pin-Out | 1 | 2 | 3 | 4 |
| Single(S) | AC(N) | AC(L) | +Vo | -Vo |


Note: If the definition of pin is not in accordance with the model selection manual, please refer to the label on actual item.

Ripple & Noise Test: (Twisted Pair Method 20MHZ bandwidth)



Test Method:

(1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.

(2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

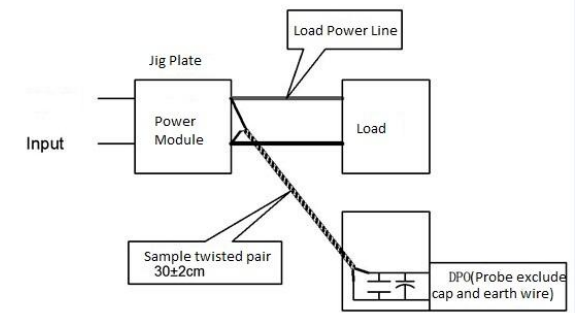

Product Characteristic Curve

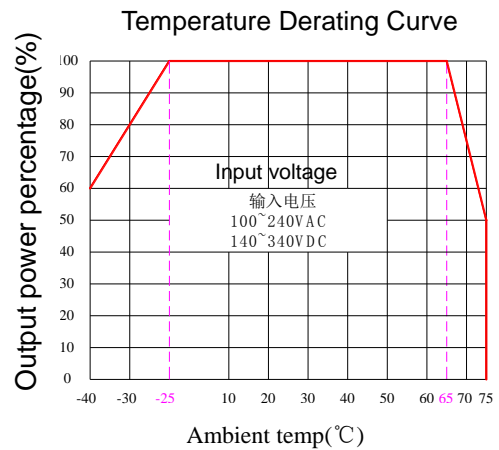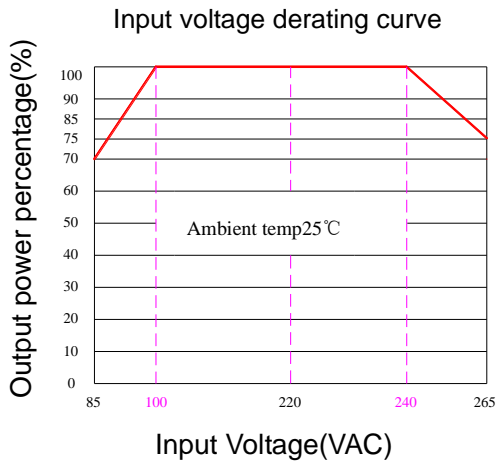


Note

- 1: Input voltage should be derated based on input voltage derating curve when it is 85~100VAC/240~265VAC/120~140VDC/340~380VDC.
- 2: Our product is suitable to use under natural air cooling environment, if use it under closed condition, please contact with us.

Typical Application Circuit



1. EMC Solution and Recommended Circuit

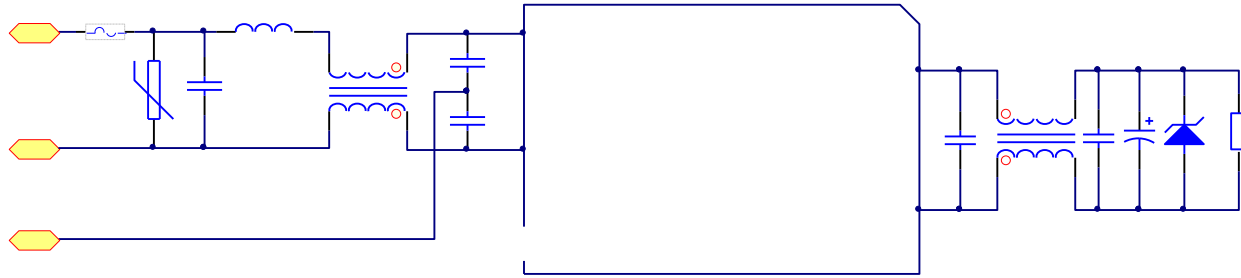

(Photo 1:EMC recommended circuit)

| Part No | C3(u F) | TVS |
|---------------|---------|----------|
| UA10-220S05P2 | 470 | SMBJ7.0A |
| UA10-220S09P2 | 330 | SMBJ12A |
| UA10-220S12P2 | 220 | SMBJ20A |
| UA10-220S15P2 | 100 | SMBJ20A |
| UA10-220S24P2 | 68 | SMBJ30A |

Note 1:

Output filter capacitor C3 is electrolytic capacitor, recommended to use high frequency low resistance ones, capacitance and current allowed please refer to each supplier's datasheet. C3 capacitors withstand voltage should be derated at least 80%. C1/C2 are ceramic capacitors, to filter high frequency noise, recommend to use 0.1uF/50V/1206. TVS is recommended to use to protect back circuit if converters fails.

| Part No | Name | Spec | Recommended value |
|---------|---|--------------------------------|-------------------------------------|
| FUSE | FUSE | 3.15A/250Vac | 3.15A/250Vac,slow fusing, necessary |
| MOV | Voltage dependent resistor | 14D471K | 14D471K |
| CX1 | X capacitor | 0.22uF/275Vac | 0.22uF/275Vac |
| L1 | Differential mode inductor | 2.5uH/2.5A | 2.5uH/2.5A, I inductor |
| L2 | Common mode inductor | Green ring 15mH/2.5A T12X7X6mm | 15mH/2.5A |
| CY1 | Y capacitor | 102M-400Vac | 102M-400Vac |
| CY2 | | | |
| L3 | Common mode inductor | Green ring, T13X8, 145uH | 145uH |
| RL | Customer terminal load (terminal product) | | |

Note:

- The product cannot be used beyond the specification range, otherwise it will cause permanent damage to it;
- Input terminal should connect to fuse;
- If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity < 75% with nominal input voltage and rated output load (pure resistance load);
- All index testing methods in this datasheet are based on our Company's corporate standards;
- The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technician for specific information;
- We can provide product customized product;
- Specifications are subject to change without prior notice (except customized items).