HPL Attenuator 50W ASTB- 302X

Product Description

Attenuators are used in absorbing energy of transmission line,expanding power range and controlling power level.

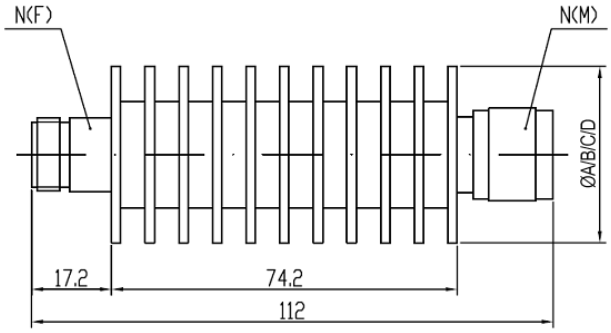

Features

- **Low VSWR**
- **Wide frequency band**
- **Flatness attenuation value**
- **High reliability**

Electrical Characteristics

Frequency Band:	0~3000MHz
Impedance:	50Ω
VSWR:	≤1.20
Average Power:	50W

Mechanical & Environmental Characteristics

Operating Temperature:	-40 ℃ ~ +85 ℃
Relative Humidity:	0~100%
Application:	Indoor

Type

Product number	Attenuation(dB)	Attenuation deviation(dB)	Connector Type
C2804X	3	±0.4	N male-N female
C4711X	3	±0.4	4.3-10 male-4.3-10 female
C4712X	3	±0.4	Din male-Din female
C2805X	6	±0.4	N male-N female
C4713X	6	±0.4	4.3-10 male-4.3-10 female
C4714X	6	±0.4	Din male-Din female
C2806X	10	±0.6	N male-N female
C4715X	10	±0.6	4.3-10 male-4.3-10 female
C4716X	10	±0.6	Din male-Din female
C4719X	15	±0.6	4.3-10 male-4.3-10 female
C4720X	15	±0.6	Din male-Din female
C2807X	20	±0.8	N male-N female
C4717X	20	±0.8	4.3-10 male-4.3-10 female
C4718X	20	±0.8	Din male-Din female
C2723X	30	±0.8	N male-N female

ACOME TELECOM, DATA & INFRASTRUCTURES
52 rue du Montparnasse – 75014 Paris – France
T. +33 (0)1 42 79 14 00 – F. +33 (0)1 42 79 15 00
E-mail : rf-emea@acome.fr – Site : www.acome.fr

Edition: A2– 23/07/2019

This technical specification is for reference only and is subject to change without notice.