


T Cores 尺寸及规格

T Cores

✓ Application : the network transformer

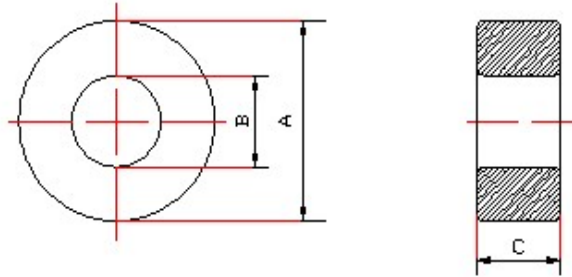

P---Parylene coating

C---Epoxy coating

Part Number	DIMENSIONS(mm)			DIMENSIONS (INCHE)			l_e	A_e	V_e	$C1$	wt/pcs
	A± 0.15	B± 0.15	C± 0.15	A± 0.006	B± 0.006	C± 0.006	mm	mm ²	mm ³	mm ⁻¹	(g)
T2.03*1.00*0.76	2.03	1.0	0.76	0.08	0.039	0.030	4.383	0.375	1.645	11.676	0.008
T2.03*1.27*0.76	2.03	1.27	0.76	0.08	0.05	0.030	4.998	0.284	1.50	17.63	0.007
T2.54*1.27*0.76	2.54	1.27	0.76	0.100	0.050	0.030	5.531	0.465	2.572	11.896	0.012
T2.54*1.27*0.99	2.54	1.27	0.99	0.100	0.050	0.039	5.531	0.604	3.343	9.151	0.02
T2.54*1.27*1.27	2.54	1.27	1.27	0.100	0.050	0.050	5.531	0.775	4.286	7.138	0.02
T2.54*1.27*2.54	2.54	1.27	2.54	0.100	0.050	0.100	5.531	1.550	8.572	3.569	0.05
T2.54*1.32*1.27	2.54	1.32	1.27	0.100	0.052	0.050	5.651	0.747	4.224	7.558	0.02
T2.54*1.35*1.27	2.54	1.35	1.27	0.100	0.053	0.050	5.722	0.730	4.182	7.827	0.02
T2.54*1.40*1.27	2.54	1.40	1.27	0.100	0.055	0.050	5.838	0.702	4.103	8.305	0.02
T2.59*1.37*1.27	2.59	1.37	1.27	0.102	0.054	0.050	5.819	0.749	4.358	7.768	0.02
T2.54*1.50*0.99	2.54	1.50	0.99	0.100	0.059	0.039	6.059	0.504	3.054	12.021	0.02
T2.70*1.32*0.76	2.70	1.32	0.76	0.106	0.052	0.030	5.806	0.503	2.918	11.552	0.0157
T2.70*1.32*2.06	2.70	1.32	2.06	0.106	0.052	0.081	5.806	1.362	7.909	4.262	0.0426
T2.90*1.60*1.27	2.90	1.60	1.27	0.114	0.063	0.050	6.668	0.801	5.345	8.319	0.03
T2.92*1.63*1.78	2.92	1.63	1.78	0.115	0.064	0.070	6.749	1.119	7.553	6.030	0.04

T2.92*1.63*2.41	2.92	1.63	2.41	0.115	0.064	0.095	6.749	1.519	10.251	4.443	0.05
T2.92*1.68*2.06	2.92	1.68	2.06	0.115	0.066	0.081	6.870	1.245	8.555	5.518	0.0461
T2.95*1.60*1.78	2.95	1.60	1.78	0.116	0.063	0.070	6.720	1.165	7.827	5.770	0.0396
T3.05*1.27*0.76	3.05	1.27	0.76	0.120	0.050	0.030	5.988	0.636	3.807	9.419	0.02
T3.05*1.27*1.27	3.05	1.27	1.27	0.120	0.050	0.050	5.988	1.060	6.345	5.651	0.04
T3.05*1.27*1.50	3.05	1.27	1.5	0.120	0.050	0.059	0.599	1.253	7.494	4.781	0.05
T3.05*1.27*2.54	3.05	1.27	2.54	0.120	0.050	0.100	5.988	2.119	12.690	2.826	0.07
T3.05*1.37*0.76	3.05	1.37	0.76	0.120	0.054	0.030	6.254	0.605	3.786	10.33	0.02
T3.05*1.52*2.06	3.05	1.52	2.06	0.120	0.060	0.081	6.637	1.506	10.000	4.406	0.05
T3.05*1.65*1.65	3.05	1.65	1.65	0.120	0.065	0.065	6.938	1.118	7.755	6.207	0.04
T3.05*1.65*2.39	3.05	1.65	2.39	0.120	0.065	0.094	6.938	1.616	11.215	4.292	0.06
T3.05*1.78*1.50	3.05	1.78	1.50	0.120	0.070	0.059	7.232	0.930	6.725	7.778	0.04
T3.05*1.78*1.52	3.05	1.78	1.52	0.120	0.070	0.060	7.226	0.945	6.826	7.649	0.04
T3.05*1.78*1.78	3.05	1.78	1.78	0.12	0.070	0.064	7.232	1.103	7.979	6.554	0.0407
T3.05*1.78*2.03	3.05	1.78	2.03	0.120	0.070	0.080	7.226	1.260	9.101	5.737	0.05
T3.05*1.88*2.06	3.05	1.88	2.06	0.120	0.074	0.081	7.450	1.185	8.805	6.304	0.05
T3.20*1.78*2.06	3.20	1.78	2.06	0.126	0.070	0.081	7.391	1.421	10.505	5.200	0.054
T3.30*1.27*1.27	3.30	1.27	1.27	0.130	0.050	0.050	6.193	1.196	7.412	5.178	0.05
T3.30*1.27*1.53	3.30	1.27	1.54	0.130	0.050	0.060	6.193	1.440	8.929	4.300	0.06
T3.30*2.00*2.00	3.30	2.0	2.0	0.130	0.079	0.079	7.987	1.273	10.169	6.273	0.0514
T3.43*1.78*0.86	3.43	1.78	0.86	0.135	0.070	0.034	7.619	0.688	5.241	11.078	0.03
T3.43*1.78*1.52	3.43	1.78	1.52	0.135	0.070	0.060	7.619	1.214	9.248	6.277	0.05
T3.43*1.78*1.78	3.43	1.78	1.78	0.135	0.070	0.070	7.619	1.416	10.790	5.381	0.06
T3.43*1.78*2.06	3.43	1.78	2.06	0.135	0.070	0.081	7.619	1.639	12.485	4.650	0.07
T3.43*1.78*2.54	3.43	1.78	2.54	0.135	0.070	0.100	7.619	2.023	15.414	3.766	0.08
T3.43*1.52*0.76	3.43	1.52	0.76	0.135	0.060	0.030	6.989	0.687	4.803	10.168	0.03
T3.50*1.78*0.76	3.50	1.78	0.76	0.137	0.070	0.030	7.694	0.629	4.842	12.22	0.03
T3.68*1.65*2.54	3.68	1.65	2.54	0.145	0.065	0.100	7.543	2.447	18.454	3.083	0.11
T3.90*1.70*2.07	3.90	1.70	2.07	0.153	0.067	0.081	7.861	2.151	16.90	3.656	0.09
T3.94*1.68*1.37	3.94	1.68	1.37	0.155	0.066	0.054	7.831	1.459	11.429	5.366	0.07

T3.94*1.78*1.27	3.94	1.78	1.27	0.155	0.070	0.050	8.097	1.301	10.534	6.224	0.06
T3.94*1.78*1.50	3.94	1.78	1.52	0.155	0.070	0.059	8.105	1.537	12.46	5.272	0.07
T3.94*1.78*1.52	3.94	1.78	1.52	0.155	0.070	0.060	8.097	1.561	12.641	5.186	0.07
T3.94*1.78*1.78	3.94	1.78	1.78	0.155	0.070	0.070	8.097	1.821	14.748	4.445	0.08
T3.94*1.78*2.54	3.94	1.78	2.54	0.155	0.070	0.100	8.097	2.602	21.068	3.112	0.12
T3.94*2.24*1.27	3.94	2.24	1.27	0.155	0.088	0.050	9.196	1.052	9.677	8.740	0.05
T3.94*2.24*1.65	3.94	2.24	1.65	0.155	0.088	0.065	9.196	1.368	12.580	6.723	0.07
T3.94*2.24*2.01	3.94	2.24	2.01	0.155	0.088	0.079	9.196	1.663	15.289	5.531	0.08
T3.94*2.24*2.54	3.94	2.24	2.54	0.155	0.088	0.100	9.196	2.104	19.353	4.370	0.10
T3.99*2.01*0.99	3.99	2.01	0.99	0.157	0.079	0.039	8.715	0.944	8.223	9.235	0.05
T4.83*2.29*1.27	4.83	2.29	1.27	0.190	0.090	0.050	10.196	1.540	15.701	6.621	0.09
T4.83*2.29*2.54	4.83	2.29	2.54	0.190	0.090	0.100	10.196	3.080	31.401	3.311	0.18
T4.95*1.57*0.76	4.95	1.57	0.76	0.195	0.062	0.030	8.312	1.155	9.601	7.196	0.06
T5.84*3.05*1.52	5.84	3.05	1.52	0.230	0.120	0.060	13.026	2.055	26.775	6.337	0.14
T5.84*3.05*2.54	5.84	3.05	2.54	0.230	0.120	0.100	13.026	3.426	44.624	3.802	0.24
T5.84*3.05*3.05	5.84	3.05	3.05	0.230	0.120	0.120	13.026	4.111	53.549	3.169	0.29
T5.84*3.05*3.18	5.84	3.05	3.18	0.230	0.120	0.125	13.026	4.282	55.780	3.042	0.30
T5.84*3.05*4.29	5.84	3.05	4.29	0.230	0.120	0.169	13.026	5.790	75.415	2.250	0.41
T6.00*3.00*3.00	6.00	3.00	3.00	0.236	0.118	0.118	13.066	4.324	56.496	3.022	0.30
T6.05*2.95*3.18	6.05	2.95	3.18	0.238	0.116	0.125	12.978	4.713	61.163	2.754	0.34

✓ **T Cores**

✓ **Application : Power transformer**

Part Number	DIMENSIONS(mm)			DIMENSIONS (INCHE)			<i>le</i>	<i>Ae</i>	<i>Ve</i>	<i>C1</i>	wt/pcs
	A±	B±	C±	A±	B±	C±	mm	mm ²	mm ³	mm ⁻¹	(g)
T7.60*4.00*6.00	7.60	4.00	6.00	0.299	0.1575	0.236	17.028	10.437	177.714	1.632	0.91
T8.00*3.18*4.78	8.00	3.18	4.78	0.315	0.125	0.188	15.284	10.736	164.094	1.424	0.99

T8.00*4.00*4.00	8.0	4.0	4.0	0.315	0.1575	0.1575	18.85	8.0	150.8	2.36	0.76
T9.00*5.00*3.00	9.1	5.1	3.0	0.3583	0.2008	0.1181	21.99	6	131.95	3.67	0.6
T9.53*4.75*6.35	9.53	4.75	6.35	0.375	0.187	0.250	1.42	20.716	14.579	302.005	1.66
T9.53*4.75*3.18	9.53	4.75	3.18	0.375	0.187	0.125	2.84	20.716	7.301	151.244	0.83
T9.53*4.75*4.78	9.53	4.75	4.78	0.375	0.187	0.188	1.89	20.716	10.963	227.108	1.25
T10.00*5.00*5.0	10.00	5.00	5.00	0.394	0.197	0.197	1.81	21.788	12.018	261.844	1.44
T10.0*5.00*4.00	10.00	5.00	4.00	0.394	0.197	0.157	2.27	21.788	9.602	209.209	1.15
T10.0*6.00*4.00	10.00	6.00	4.00	0.394	0.236	0.157	3.04	24.007	7.886	189.327	0.99
T12.0*6.00*4.00	12.00	6.00	4.00	0.472	0.236	0.157	2.27	26.141	11.515	301.024	1.65
T12.7*7.92*3.18	12.70	7.92	3.18	0.500	0.312	0.125	4.19	31.216	7.449	232.536	1.20
T12.7*7.92*6.35	12.70	7.92	6.35	0.500	0.312	0.250	2.10	31.216	14.898	465.071	2.40
T12.7*7.92*5.08	12.70	7.92	5.08	0.500	0.312	0.200	2.62	31.216	11.919	372.057	1.92
T12.7*7.14*4.78	12.70	7.14	4.78	0.500	0.281	0.188	2.28	29.500	12.920	381.139	2.02
T12.7*7.14*6.35	12.70	7.14	6.35	0.500	0.281	0.250	1.72	29.500	17.181	506.834	2.68
T13.21*7.37*3.96	13.21	7.37	3.96	0.520	0.290	0.156	2.72	30.551	11.251	343.728	1.82
T13.21*6.37*6.05	13.21	7.37	6.05	0.520	0.290	0.238	1.78	30.551	17.165	524.406	2.78
T14.00*8.00*9.00	14.00	8.00	9.00	0.551	0.315	0.3540	34.56	27	933.05	1.28	4.48
T14.00*9.00*5.00	14.00	9.00	5.00	0.551	0.354	0.197	2.85	34.977	12.293	429.970	2.20
T15.88*8.89*4.70	15.88	8.89	4.70	0.625	0.350	0.185	2.31	36.804	15.959	587.354	3.11
T16.0*9.00*5.00	16.00	9.00	5.00	0.630	0.354	0.197	2.18	37.167	17.062	634.133	3.35
T16.0*12.00*8.0	16.00	12.00	8.00	0.630	0.472	0.315	2.72	43.363	15.944	691.305	3.43
T18.0*10.0*7.0	18.00	10.00	7.00	0.709	0.394	0.2756	43.98	28.00	1231.00	1.57	6.13
T18.0*10.0*8.0	18.00	10.00	8.00	0.709	0.394	0.315	43.98	32.00	1407.00	1.37	6.91
T18.0*10.0*10.0	18.00	10.00	10.0	0.709	0.394	0.394	43.98	40.00	1759.00	1.10	8.77
T19.0*11.0*5.0	19.00	11.00	5.00	0.748	0.433	0.197	47.12	20.00	942.48	2.36	4.43
T20.0*10.0*7.0	20.0	10.0	7.0	0.7874	0.3937	0.2756	47.12	35.0	1649.34	1.35	8.06
T20.0*10.0*10.0	20.0	10.0	10.0	0.7874	0.3937	0.3937	47.12	50.0	2356.2	0.94	11.24
T20.0*10.0*12.0	20.0	10.0	12.0	0.7874	0.3937	0.4724	47.12	60.0	2827.4	0.79	13.6
T22.0*11.0*7.0	22.0	11.0	7.0	0.8661	0.4331	0.2756	51.81	38.5	1994.7	1.35	9.74
T22.0*14.0*6.5	22.0	14.0	6.5	0.8661	0.5512	0.2559	56.55	26.0	1470.27	2.17	6.78

T22.0*14.0*8.0	22.0	14.0	8.0	0.8661	0.5512	0.3150	56.55	32.0	1809.56	1.77	8.62
T22.0*14.0*10.0	22.0	14.0	10.0	0.8661	0.5512	0.3937	56.55	40.0	2261.95	1.41	11.33
T22.0*14.0*12.7	22.0	14.0	12.7	0.8661	0.5512	0.500	56.55	50.8	2872.67	1.11	14.04
T23.0*11.0*6.0	23.0	11.0	6.0	0.9055	0.4331	0.2362	53.41	36.0	1022.65	1.48	9.4
T23.0*14.0*7.0	23.0	14.0	7.0	0.9055	0.5512	0.2756	58.11	31.5	1830.76	1.85	8.54
T25.0*15.0*5.0	25.0	15.0	5.0	0.9842	0.5905	0.1969	62.83	25.0	1570.8	2.51	7.44
T25.0*15.0*8.0	25.0	15.0	8.0	0.9842	0.5905	0.3150	62.83	40.0	2513.3	1.57	12.1
T25.0*15.0*10.0	25.0	15.0	10.0	0.9842	0.5905	0.3937	62.83	50.0	3141.6	1.26	14.90
T25.0*15.0*12.0	25.0	15.0	12.0	0.9842	0.5905	0.4724	62.83	60.0	3769.92	1.05	17.95
T25.0*15.0*15.0	25.0	15.0	15.0	0.9842	0.5905	0.5905	62.83	75	4172.40	0.84	23.3
T28.0*16.0*13.0	28.0	16.0	13.0	1.102	0.6299	0.5118	69.12	78	5391.36	0.89	26.3
T29.0*19.0*7.49	29.0	19.0	7.49	1.142	0.7480	0.2949	75.4	37.45	2823.66	2.01	12.90
T29.0*19.0*15.2	29.0	19.0	15.2	1.142	0.7480	0.5984	75.4	76.0	5730.27	0.99	27.75
T31.0*19.0*6.0	31.0	19.0	6.0	1.220	0.7480	0.2362	78.54	36.0	2827.43	2.18	13.22
T31.0*19.0*8.0	31.0	19.0	8.0	1.220	0.7480	0.3150	78.54	48.0	3769.91	1.64	18.2
T31.0*19.0*12.0	31.0	19.0	12.0	1.220	0.7480	0.4724	78.54	72	5654.87	1.09	27.0
T31.0*19.0*13.0	31.0	19.0	13.0	1.220	0.7480	0.5118	78.54	78.0	6126.11	1.01	29.04
T31.0*19.0*16.0	31.0	19.0	16.0	1.220	0.7480	0.6299	78.54	78.0	7539.82	0.82	35.74

备注： 外径、内经相同产品，高度C尺寸可以调节，从**1.00~18.00** mm，无需新开模具。

✓ **T Cores**

✓ **Application : Power transformer**

Part Number	DIMENSIONS(mm)			DIMENSIONS (INCHE)			<i>le</i>	<i>Ae</i>	<i>Ve</i>	<i>C1</i>	wt/pcs
	A±	B±	C±	A±	B±	C±	mm	mm ²	mm ³	mm ⁻¹	(g)
T34.4*20.2*12.6	34.4	20.2	12.6	1.354	0.7953	0.496	85.72	89.46	7668.69	0.95	36.92
T36.0*23.0*10.0	36.0	23.0	10.0	1.417	0.9055	0.3937	92.68	65.0	6024.0	1.43	26.94
T36.0*23.0*15.0	36.0	23.0	15.0	1.417	0.9055	0.5905	92.68	97.5	9036.01	0.95	41.37

✓ T Cores

Part Number	$A_L \pm 25\% (nH / N^2)$								$A_L \pm 30\% (nH / N^2)$	
	NiZn				DC Bias	High permeability				
	IN351	IN651	IN801	IN102	IM5kB	IM5k	IM7k	IM10k	IM12k	
T2.03*1.00*0.76	-	-	60	72	-	-	-	-	-	
T2.03*1.27*0.76	-	-	-	-	-	350	-	700	-	
T2.54*1.27*0.76	37	69	85	-	475	528	-	1056	1267	
T2.54*1.27*0.99	-	-	110	138	619	688	-	1373	1648	
T2.54*1.27*1.27	-	-	141	176	-	880	-	1761	-	
T2.54*1.27*2.54	-	-	282	-	1585	-	-	-	-	
T2.54*1.32*1.27	-	-	133	-	-	-	-	-	-	
T2.54*1.35*1.27	-	-	128	-	-	-	-	-	-	
T2.54*1.40*1.27	-	-	121	-	-	-	-	-	-	
T2.59*1.37*1.27	-	-	129	-	-	-	-	-	-	
T2.54*1.50*0.99	-	-	-	105	-	-	-	1045	-	
T2.70*1.32*0.76	-	-	-	-	-	-	760	1080	1300	
T2.70*1.32*2.06	-	-	-	-	1100	-	-	-	-	
T2.90*1.60*1.27	-	-	121	-	-	-	-	-	-	
T2.92*1.63*1.78	-	-	-	-	938	1042	-	-	-	
T2.92*1.63*2.41	-	-	-	-	1273	-	-	-	-	
T2.92*1.68*2.06	-	-	-	-	1030	-	-	-	-	
T2.95*1.60*1.78	-	-	-	-	980	-	-	-	-	
T3.05*1.27*0.76	-	-	107	-	600	667	-	-	-	
T3.05*1.27*1.27	-	-	178	-	-	1112	-	2224	-	
T3.05*1.27*2.54	-	-	-	-	2001	-	-	-	-	
T3.05*1.37*0.76	-	-	-	-	-	608	-	-	-	
T3.05*1.52*2.06	-	-	-	-	1284	-	-	-	-	
T3.05*1.65*1.65	-	-	162	202	-	-	-	-	-	
T3.05*1.65*2.39	-	-	-	-	1317	-	-	-	-	
T3.05*1.78*1.50	-	-	130	-	-	-	-	-	-	
T3.05*1.78*1.52	-	-	131	-	-	821	-	-	-	

T3.05*1.78*1.78	-	-	150	180	0.8	-	-	-	-
T3.05*1.78*2.03	-	-	175	-	986	-	-	-	-
T3.05*1.88*2.06	-	-	-	-	900	-	-	-	-
T3.20*1.78*2.06	-	-	-	-	1.05	-	-	-	-
T3.30*1.27*1.27	-	-	194	242	-	-	-	-	-
T3.30*1.27*1.53	-	-	234	-	-	-	-	-	-
T3.30*2.00*2.00	-	-	-	-	0.85	-	-	-	-
T3.43*1.78*0.86	-	-	90	-	510	-	-	1134	-
T3.43*1.78*1.52	-	-	160	-	901	1001	-	-	-
T3.43*1.78*1.78	-	-	-	-	1051	1168	-	-	-
T3.43*1.78*2.06	-	-	216	-	1216	1351	-	2703	-
T3.43*1.78*2.54	-	-	-	-	-	-	-	3336	-
T3.43*1.52*0.76	-	-	-	-	556	-	-	-	-
T3.50*1.78*0.76	-	-	-	-	-	514	-	-	-
T3.68*1.65*2.54	-	-	-	-	1834	-	-	-	-
T3.90*1.70*2.07	-	-	-	-	1547	-	-	-	-
T3.94*1.78*1.27	-	-	-	-	909	-	1413	-	-
T3.94*1.78*1.50	-	-	-	-	1073	-	-	-	-
T3.94*1.78*1.52	-	-	-	-	1090	-	-	-	-
T3.94*1.78*1.78	-	-	-	-	1272	-	1979	2827	-

T Cores

Part Number	$A_L \pm 25\% (nH/N^2)$						$A_L \pm 30\% (nH/N^2)$				
	NiZn				DC Bias	High permeability					
	IN351	IN651	IN801	IN102	IM5kB	IM5k	IM7k	IM10k	IM12k		
T3.94*1.78*2.54	-	-	-	-	1817	-	-	-	-		
T3.94*1.68*1.37	-	-	-	-	-	1171	-	2342	-		
T3.94*2.24*1.27	-	-	115	-	-	719	-	1438	-		
T3.94*2.24*1.65	-	-	150	187	-	-	-	-	-		
T3.94*2.24*2.01	-	-	182	-	-	1136	-	2272	-		

T3.94*2.24*2.54	-	-	230	-	1294	-	-	2876	-
T3.99*2.01*0.99	-	-	109	-	-	-	-	1361	-
T4.83*2.29*1.27	-	-	152	-	-	949	-	-	-
T4.83*2.29*2.54	-	-	-	-	-	-	2657	3796	-
T4.95*1.57*0.76	-	-	-	-	786	-	-	-	-
T5.84*3.05*1.52	-	-	159	-	892	991	-	-	-
T5.84*3.05*2.54	-	-	-	-	-	1652	-	3304	-
T5.84*3.05*3.05	-	-	317	-	-	1983	-	3966	-
T5.84*3.05*3.18	-	-	330	-	-	2066	2892	4131	-
T5.84*3.05*4.29	-	-	-	-	-	-	-	5585	-
T6.00*3.00*3.00	-	-	-	-	1871	-	-	4160	4.990
T6.05*2.95*3.18	-	-	-	-	-	-	3195	4564	-
T7.60*4.00*6.00	-	-	-	-	-	3850	-	-	-
T8.00*3.18*4.78	-	-	-	-	-	-	-	8827	-
T9.53*4.75*6.35	-	-	-	-	-	4422	-	8844	-
T9.53*4.75*3.18	-	-	-	-	-	2214	3100	4429	-
T9.53*4.75*4.78	-	-	-	-	-	3325	-	6650	-
T10.00*5.00*5.0	-	-	-	-	-	3466	-	6932	-
T10.0*5.00*4.00	-	-	-	-	-	-	3877	5538	-
T10.0*6.00*4.00	-	-	-	-	-	-	-	4128	-
T12.0*6.00*4.00	-	-	-	-	-	2768	3875	5536	6643
T12.7*7.92*3.18	-	-	-	-	-	1500	2099	3000	-
T12.7*7.92*6.35	-	-	-	-	-	2968	4198	5936	7123

✓ **T Cores**

Part Number	$A_L \pm 30\% \text{ (nH /N}^2 \text{)}$			
	High permeability			
	IM5k	IM7k	IM10k	IM12k
T12.7*7.92*5.08	2396	3359	4798	-
T12.7*7.14*4.78	2715	-	5430	-
T12.7*7.14*6.35	3659	5123	7318	8781
T13.21*7.37*3.96	2314	-	4628	-
T13.21*6.37*6.05	-	-	4942	-
T14.0*9.00*5.00		3092	4416	-
T15.88*8.89*4.7	2725	-	5449	-
T16.0*9.00*5.00	-	-	5763	-
T16.0*12.00*8.0	-	3222	4603	5524
T18.0*10.0*8.0	4700	6580	9400	10980
T18.0*10.0*10.0	5880	8230	11750	13720
T19.0*11.0*5.0	-	3800	-	-
T20.0*10.0*7.0	4670	6540	9300	-
T20.0*10.0*10.0	6670	9300	13300	16000
T20.0*10.0*12.0	-	-	16000	19000
T22.0*11.0*7.0	-	6540	9330	-
T22.0*14.0*6.5	2940	4110	5870	-
T22.0*14.0*8.0	3620	5060	7230	-
T22.0*14.0*10.0	4520	6330	9040	10670
T22.0*14.0*12.7	5740	-	11480	13560
T23.0*14.0*7.0	3470	4860	6950	8180
T25.0*15.0*5.0	2500	3500	5000	-
T25.0*15.0*8.0	4090	5720	8200	9600
T25.0*15.0*10.0	5110	7150	10220	11000
T25.0*15.0*12.0	6130	8580	12260	-

✓ **T Cores**

Part Number	$A_L \pm 30\%$ (nH /N ²)			
	High permeability			
	IM5k	IM7k	IM10k	IM12k
T25.0*15.0*15.0	7660	10730	15330	-
T28.0*16.0*13.0	-	-	14110	-
T29.0*19.0*7.49	3170	4430	6340	7495
T29.0*19.0*15.2	6440	9020	12890	15200
T31.0*19.0*6.0	2940	4110	5880	-
T31.0*19.0*8.0	3920	5480	7830	-
T31.0*19.0*12.0	5870	8220	11740	-
T31.0*19.0*13.0	6360	8910	12730	14500
T31.0*19.0*16.0	7685	10760	15200	-
T34.4*20.2*12.6	6560	-	-	-
T36.0*23.0*10.0	4285	6000	8570	10140
T36.0*23.0*15.0	6430	9000	12860	14500