


# CERAMIC STANDARD PRESSURE SENSOR CPS 1184



Metallux monolithic pressure sensors are manufactured in large series and are in use in a range of applications in machinery production, the automotive industry, and ventilation and climate control equipment. The easy installation and calibration of the sensors simplifies the customer's production processes. The CPS 1184 features a compact design, high media compatibility and excellent long-term stability.




TECHNICAL SPECIFICATIONS	
Resistance/Tolerance	10 kΩhm ± 20%
Output signal	See table "Span"
Linearity, hysteresis, reproducibility	≤ ± 0.4% FS typ.; pNom ≤ 60 bar ≤ ± 0.8% FS typ.; pNom > 6 bar max < ± 1.5% FS ***
Supply voltage	5...30 V
Zero signal range	−0.2...0 mV/V * {opt. −0.1...0 mV/V} *
Zero signal stability	≤ ± 0.25% FS (1000h @ 125 °C) ≤ ± 0.1% FS (2.5 million pressure cycles 0...100%)
Span stability	≤ ± 0.05% FS (1000h @ 125 °C) ≤ ± 0.05% FS (2.5 million pressure cycles 0...100%)
Temperature error, zero point	< ± 0.02% FS/K *
Temperature error, span	≤ 0.012% FS (0...85 °C)
Electrical connectors	Tinned solder pads, pins, flat flexible cable
Nominal/Operating/Storage temperature range	− 40...125 °C *
Material of parts that contact the media	Al2O3 96% **
Dimensions	see dimensional drawings
Pressure type	Relative pressure

NOMINAL PRESSURE	SPAN	BURST PRESSURE	VACUUM
<b>1.6 bar</b>	1.5...2.8 mV/V	≥ 4 bar	Vacuum-resistant
<b>2.5 bar</b>	2.5...4.4 mV/V	≥ 7 bar	Vacuum-resistant
<b>4 bar</b>	1.5...2.8 mV/V	≥ 15 bar	Vacuum-resistant
<b>6 bar</b>	2.4...4.2 mV/V	≥ 15 bar	Vacuum-resistant
<b>10 bar</b>	2.7...4.0 mV/V	≥ 35 bar	Vacuum-resistant
<b>16 bar</b>	2.2...3.5 mV/V	≥ 50 bar	Vacuum-resistant
<b>25 bar</b>	3.7...5.3 mV/V	≥ 70 bar	Vacuum-resistant
<b>40 bar</b>	2.0...3.3 mV/V	≥ 150 bar	Vacuum-resistant
<b>60 bar</b>	3.2...4.8 mV/V	≥ 150 bar	Vacuum-resistant
<b>100 bar</b>	2.1...2.7 mV/V	≥ 250 bar	Vacuum-resistant
<b>160 bar</b>	1.4...2.7 mV/V	≥ 320 bar	Vacuum-resistant
<b>250 bar</b>	2.2...4.2 mV/V	≥ 450 bar	Vacuum-resistant
<b>400 bar</b>	1.4...2.9 mV/V	≥ 700 bar	Vacuum-resistant

Mechanical and electrical characteristics are customisable. Specifications are subject to change without notice. \* Sensor without cable \*\* Aluminium oxide offers high chemical resistance against a variety of measured media. We recommend that customers perform their own tests for new or untested applications. \*\*\* at max. setting acc. to DIN 16086

SAMPLE ORDER		
Type	Pressure range in bar	Electrical connection (acc. to drawing)
CPS 1184	100 bar	Solder pads
Other dimensions and electrical specifications on request.		

# DIMENSIONAL DRAWINGS / CONNECTOR SCHEMATIC / ELECTRICAL CONNECTORS

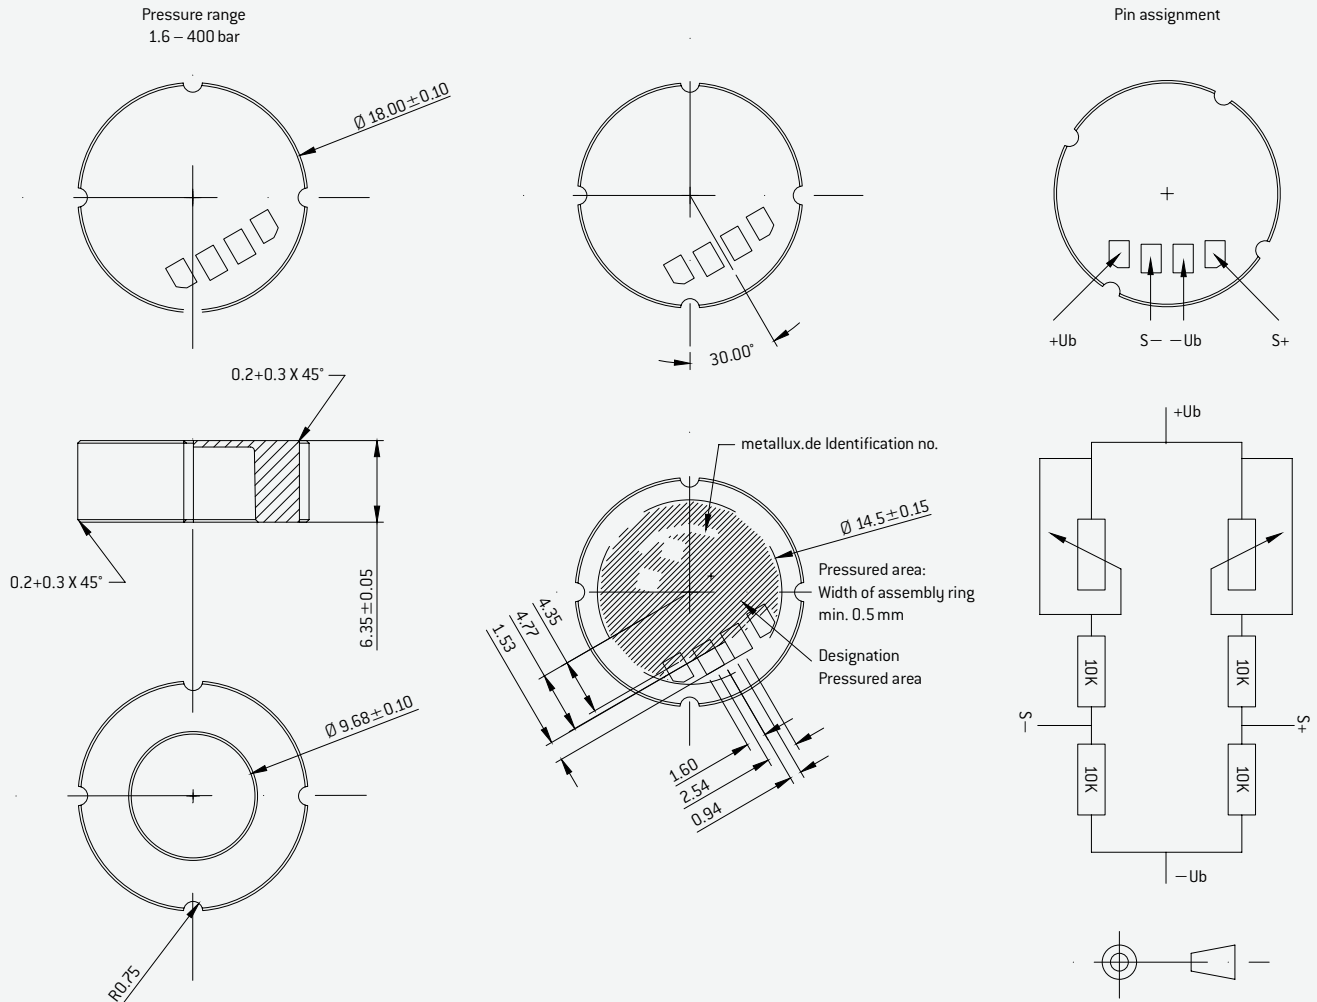

Tinned connectors  
Sn95.6 Ag3.8 Cu0.6

Flex: B04-N025-A(Nomex)  
Cover: PUR 36788-1TM

Flat flexible cable: 4 X AWG26 2.54mm  
Cover: PUR 36788-1TM

Pins: 0.5 X 0.27 tinned

