

中負荷頂針






MEDIUM-LOAD TYPE

RPM: 5000 - 6500 MT/MK. 4, 5



迷宮式迴轉頂針無油封防水結構
專利號碼 M553237

MAZE TYPE, WATERPROOF DESIGNED
WITHOUT SEAL, PAT. NO. M553237

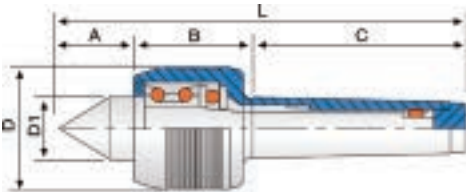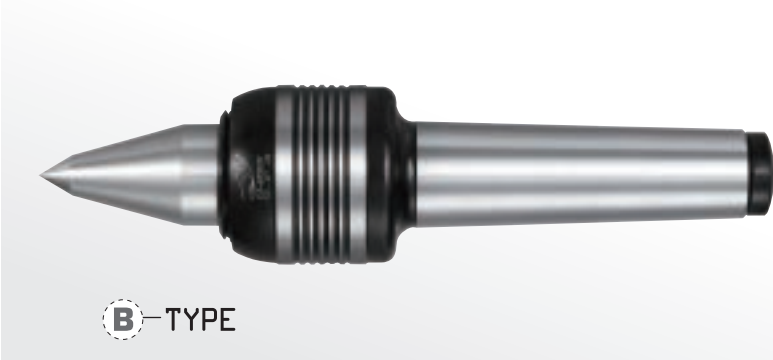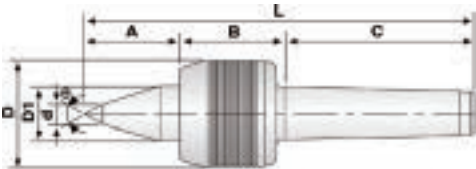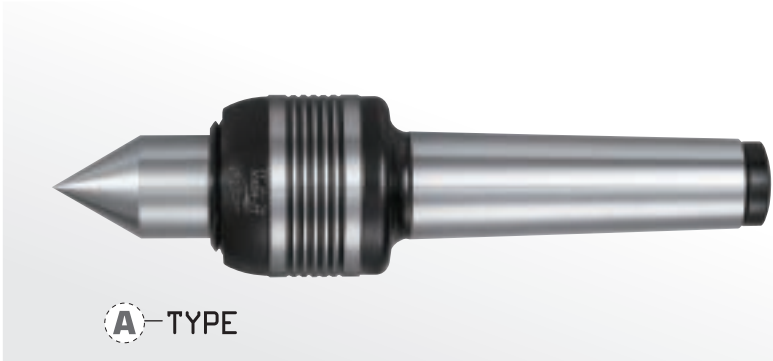

單位/Unit:mm

ORDER NO.	MORES TAPER MT/MK	A	B	C	D	D1	d	L	Co精度 Accuracy	Max R.P.M	θ	G.W. weight kgs	包裝尺寸 L x W x H
08200004	NC-MT.4A	44	55	108	53	30	-	207	0.003	6500R.P.M	60°	1.62 kgs	240 x 80 x 65
08200005	NC-MT.5A	48	61	136	68	35	-	245	0.003	5000R.P.M	60°	3.26 kgs	300 x 90 x 90
08200014	NC-MT.4B	52	55	108	53	30	12	215	0.003	6500R.P.M	60°	1.63 kgs	240 x 80 x 65
08200015	NC-MT.5B	58	61	136	68	35	14	255	0.003	5000R.P.M	60°	3.28 kgs	300 x 90 x 90

NC型 LIVE CENTER

- 1. 前端使用雙列斜角滾珠軸承及止推軸承，及滾針軸承之組合。
- 2. 此頂針適用於CNC車床，具高速及中負荷使用，具防水性。

3. 車床尾座調整壓力建議5~8公斤。

※ NC-B型;適合小工作物之加工切削。

- 1. Front end is fitted with angular contact ball bearing, thrust bearing and needle bearing.
- 2. These centers are suitable for CNC lathes at high-speed and medium-load. Waterproof design, the waterproof is maze type.

3. The tailstock pressure of lathe adjusts to five to eight kilograms (for reference)

※ NC-B type: Long nose live centers are suitable for small workpieces.

