


OSTW

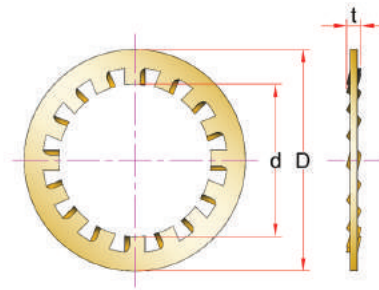

Application : Serrated Washer / Teeth Washer

- Provides means of prevention for loosening due to vibration
- Material : Stainless steel(316L)


Order Example

Part No.	Material
OSTW 16	Stainless steel

(* in mm)

Part No.	Entry Thread Size		D	d	t
	Metric	NPT/PF/PT			
OSTW 16	M16	3/8"	26	17.5	2.0
OSTW 20	M20	1/2"	32	21.5	3.0
OSTW 25	M25	3/4"	38	27	3.0
OSTW 32	M32	1"	46	33.4	3.5
OSTW 40	M40	1-1/4"	57	42.4	3.5
OSTW 50	M50	1-1/2"	72	50.5	3.5
OSTW 63	M63	2"	87	64	4.0
OSTW 75	M75	2-1/2"	98	76	4.0
OSTW 90	M90	3"	113	91	4.0
OSTW 100	M100	3-1/2"	124	103	4.0
OSTW 115	M115	4"	140	116	4.0

OSLS

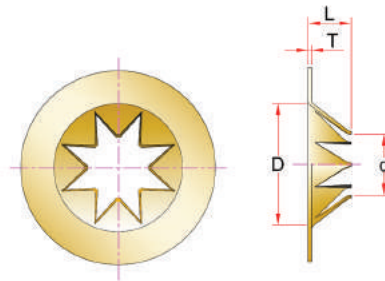

Application : Lead Sheath Washer

- For use of lead sheathed cable
- Material : Nickel plated brass

Order Example

Part No.	Material	Use
OSLS 16	Nickel plated brass	OS-A2F-U 16

(* in mm)

Part No.	D	d	L	T
OSLS-16	10	6	3.5	0.2
OSLS-20	14	6	4.5	0.35
OSLS-25	18	11	7	0.35
OSLS-32	25	16	10.5	0.35
OSLS-40	31	21	12	0.5
OSLS-50	40	27	13	0.5
OSLS-63	53	38	16	0.5
OSLS-75	61	47	18	0.5
OSLS-90	70	57	18	0.6
OSLS-100	83	64	19	0.7
OSLS-115	102	78	19	0.7