




Industrial Cable Gland Type: OSNU-MH



OSNU-MH Type

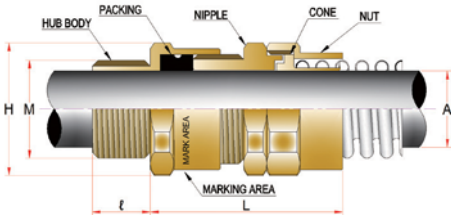

Application : Non-Armoured Cable with Metal Hose Type

- * For use with non-armoured & braided armoured cable.
- * Weatherproof & Waterproof
- * Suitable for metal hose.
- * Single Compression.

Design Specification	BS 6121, IEC 62444, EN 50262
Ingress Protection	IP 66 / 67
Applicable Cable Specification	Braided armoured cable, Unarmoured Cable
Gland Material	Nickel plated brass(standard), Brass(only), Stainless steel(316L)
Gasket (washer)	Nylon(Standard), PTFE-Teflon(Option)
Packing	Silicone
Accessories (optional)	Sealing Washer, lock nut, Earth Tag, Shroud, Serrated Washer

Order Example

Part No.	Thread	Material	Accessories
OSNU-MH 20	M20	Nickel plated brass	Lock Nut, Sealing Washer, Serrated Washer

- * Optional Thread Length : ≥15mm
- * Material for accessories is required

(* in mm)

Part No.	Entry Thread Size(M)			Thread Length(ℓ) - Min			Cable Dia	Hexagon Dimensions	Weight (g)	Length (L)
	Metric	NPT	Option	Metric	NPT	Option				
OSNU-MH 16X	M16	1/2"	M20	15	15	15	5 ~ 10.3	H24 x P26	79/95	44
OSNU-MH 20	M20	1/2"	3/4"	15	15	16	9 ~ 15.3	H27 x P29	95	49
OSNU-MH 25	M25	3/4"	1"	15	16	18	13 ~ 20	H32 x P34	125	52
OSNU-MH 32	M32	1"	1-1/4"	15	18	19	17 ~ 26	H39 x P41.5	195	54

※ The entry holes need not greater than 0.7mm