


## 2SC2001 TRANSISTOR (NPN)

### FEATURES


- High  $h_{FE}$  and Low  $V_{CE(sat)}$   
 $h_{FE}(I_C=100mA) : 200(Typ)$   
 $V_{CE(sat)}(700mA) : 0.2V (Typ)$

### MARKING




### TO-92

1. EMITTER
2. COLLECTOR
3. BASE



### Equivalent Circuit



### ORDERING INFORMATION

Part Number	Package	Packing Method	Pack Quantity
2SC2001	TO-92	Bulk	1000pcs/Bag

### MAXIMUM RATINGS( $T_a=25^{\circ}C$ unless otherwise noted)

Symbol	Parameter	Value	Unit
$V_{CBO}$	Collector-Base Voltage	30	V
$V_{CEO}$	Collector-Emitter Voltage	25	V
$V_{EBO}$	Emitter-Base Voltage	5	V
$I_C$	Collector Current -Continuous	700	mA
$P_C$	Collector Power Dissipation	600	mW
$T_J, T_{stg}$	Operation Junction and Storage Temperature Range	-55-150	$^{\circ}C$









$T_a=25\text{ }^\circ\text{C}$  unless otherwise specified




Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu\text{A}, I_E=0$	30		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=10\text{mA}, I_B=0$	25		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu\text{A}, I_C=0.5$			V
Collector cut-off current	$I_{CBO}$	$V_{CB}=30\text{V}, I_E=0$		0.1	$\mu\text{A}$
Collector cut-off current	$I_{CEO}$	$V_{CE}=20\text{V}, I_B=0$		0.1	$\mu\text{A}$
Emitter cut-off current	$I_{EBO}$	$V_{EB}=5\text{V}, I_C=0$		0.1	$\mu\text{A}$
DC current gain	$h_{FE}$	$V_{CE}=1\text{V}, I_C=100\text{mA}$ 90		400	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=700\text{mA}, I_B=70\text{mA}$		0.6	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=700\text{mA}, I_B=70\text{mA}$		1.2	V
Transition frequency	$f_T$	$V_{CE}=6\text{V}, I_C=10\text{mA}$ $f=30\text{MHz}$	50		MHz

#### CLASSIFICATION OF $h_{FE}$

Rank	M	L	K
Range	90-180 135-	270	200-400

## Static Characteristic

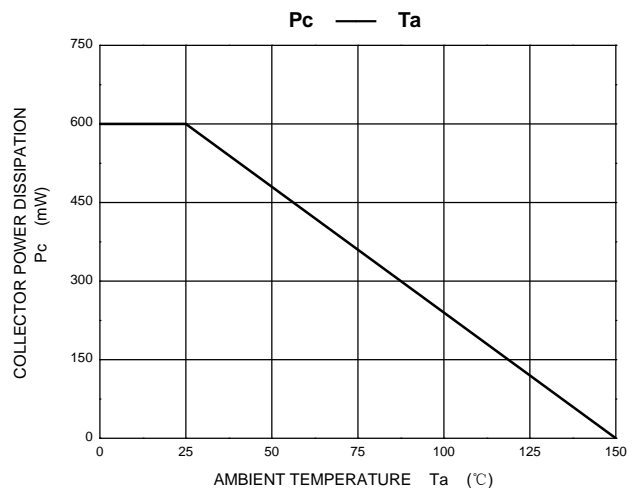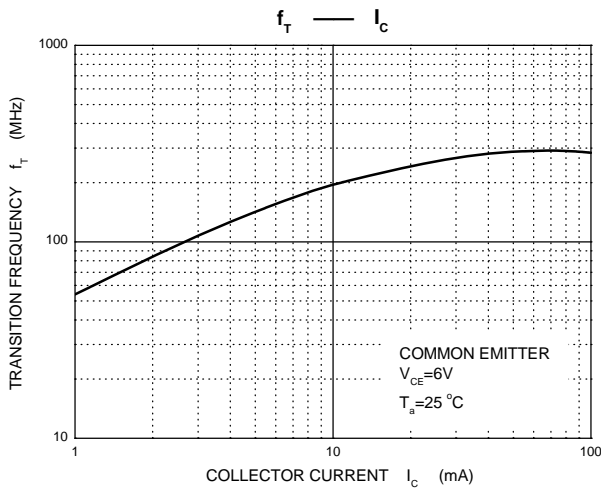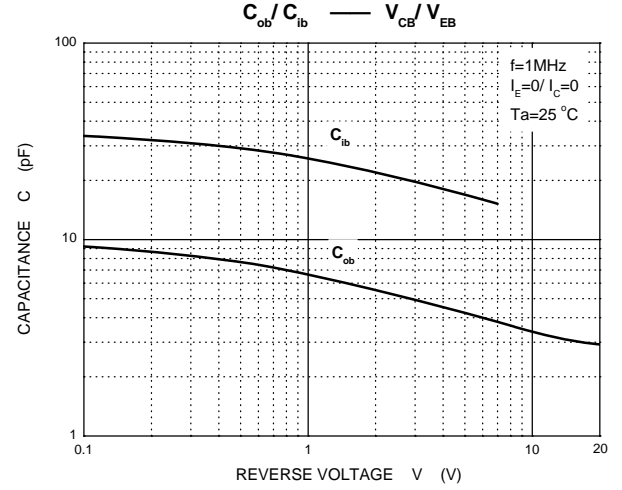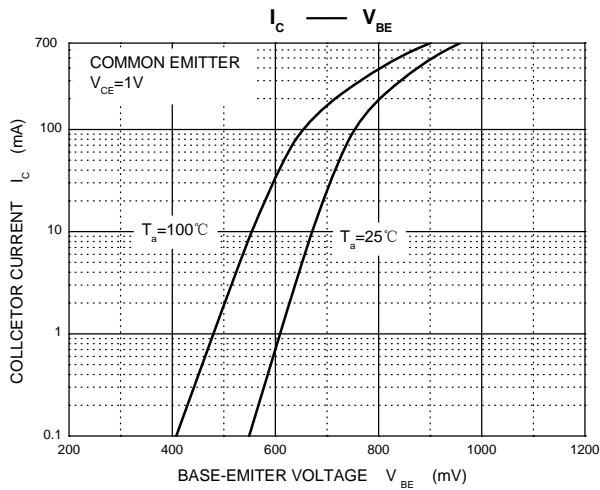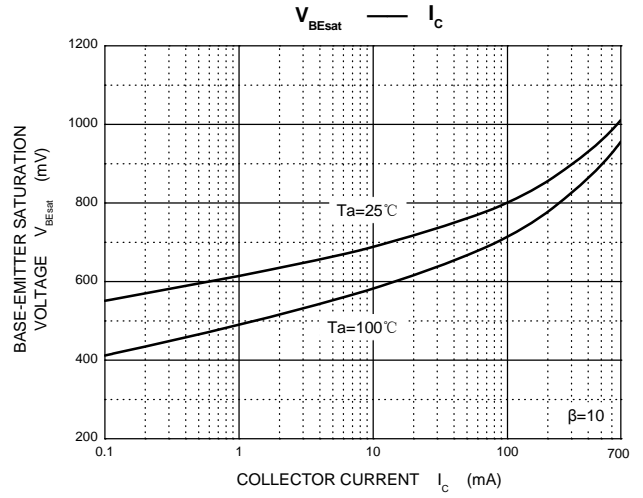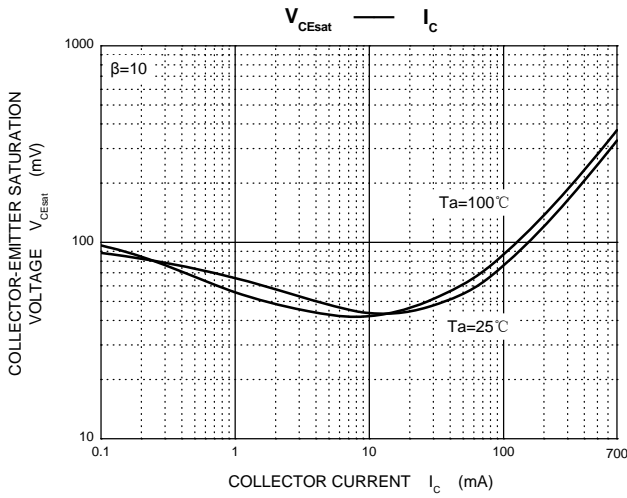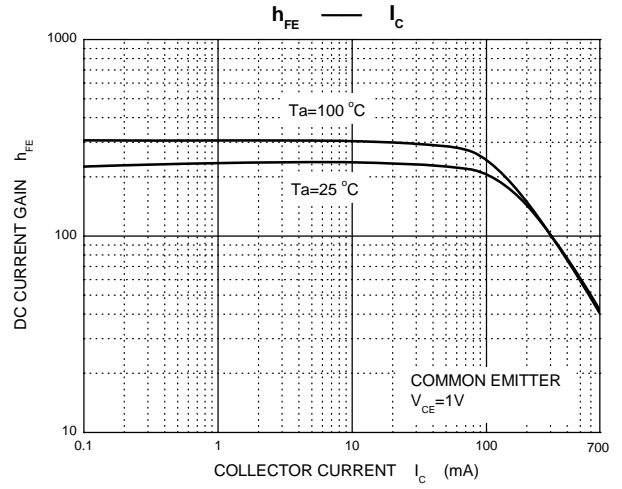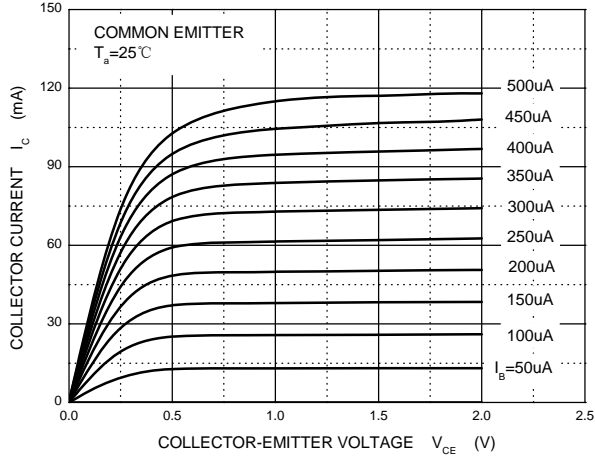

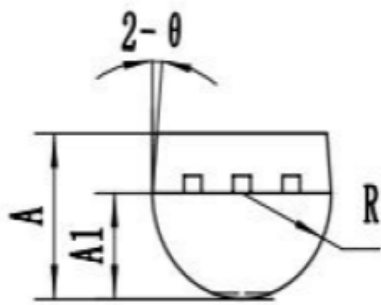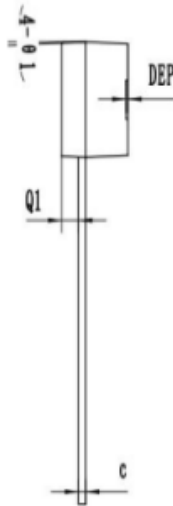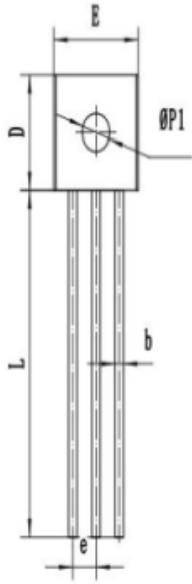

SYMBOL	MM		
	MIN	NOM	MAX
*A	3.00	3.25	3.50
A1	2.20	2.30	2.40
*b	0.40	0.45	0.50
*c	0.25	0.30	0.35
*D	4.50	4.60	4.70
*E	4.50	4.60	4.70
*e	1.22	1.27	1.32
*L	14.00	14.30	14.60
R	2.20	2.30	2.40
Q1	0.85	0.90	0.95
θ	3°	5°	7°
Ø1	1°	3°	5°
ØP1	1.40	1.50	1.60
DEP	0.05	0.10	0.20
带*为检验尺寸			