

# SFA70UP30DNT

## 70A, 300V Ultrafast Dual Diode

### Features

- Ultrafast Soft Recovery:  $t_{rr}=43\text{ns}$  (max)
- Typical Forward Voltage:  $V_F=1.1\text{V}$  @  $I_F=35\text{A}$
- Reverse Voltage:  $V_{RRM}=300\text{V}$
- Avalanche Energy Rated


### Description

The SFA70UP30DNT is an ultrafast dual diode with low forward voltage drop. This device is designed for FWD and power switching applications, It is specially suited for use in SMPS and industrial applications as welder and UPS.


### Applications

- FWD for Motor Application
- Switching Power Supply
- UPS

### Package Type & internal Circuit



TO-3PN



1. Anode 2.Cathode 3.Anode

### Absolute Maximum Ratings per diode at $T_C=25\text{ }^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Ratings	Unit
$V_{RRM}$	Peak Repetitive Reverse Voltage	300	V
$V_{RWM}$	Working Peak Reverse Voltage	300	V
$V_R$	DC Blocking Voltage	300	V
$I_{F(AV)}$	Average Rectified Forward Current	per device at $T_C=120\text{ }^\circ\text{C}$ 70	A
$I_{FSM}$	Non-repetitive Peak Surge Current	350	A
$T_J$	Operating Junction Temperature Range	-65~+150	$^\circ\text{C}$
$T_{STG}$	Storage Temperature Range	-65~+150	$^\circ\text{C}$

### Thermal Characteristics

Symbol	Parameter	Ratings	Unit
$R_{th(J-C)}$	Thermal Resistance, Junction to case	0.53	$^\circ\text{C/W}$

**Electrical Characteristics** per diode @ $T_C=25^\circ\text{C}$  unless otherwise noted

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$V_F$	Forward Voltage Drop	$I_F=35\text{A}$	-	1.1	1.4	V
		$I_F=35\text{A}, T_C=125^\circ\text{C}$	-	-	1.1	V
$I_R$	Reverse Leakage Current	$V_R=300\text{V}$	-	-	10	$\mu\text{A}$
$t_{rr}$	Reverse Recovery Time	$I_F=35\text{A}, di/dt=-200\text{A}/\mu\text{s}$	-	-	43	ns
$W_{AVL}$	Avalanche Energy	$L=30\text{mH}$	20	-	-	mJ

**Typical Performance Characteristics**

Fig. 1. Typical Characteristics:  $V_F$  vs.  $I_F$

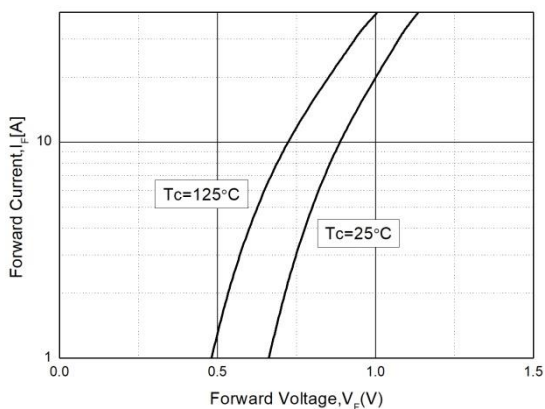


Fig. 2. Typical Characteristics:  $V_R$  vs.  $I_R$

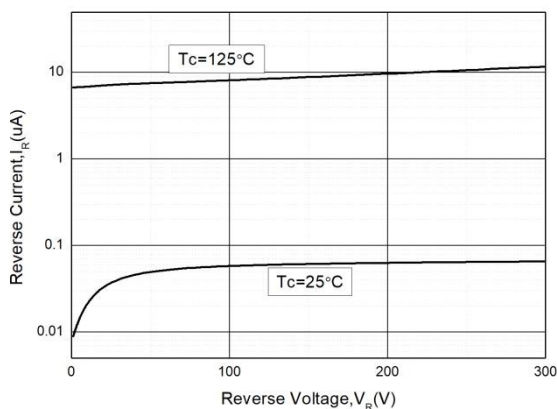


Fig. 3. Typical Reverse Recovery Time vs.  $di/dt$


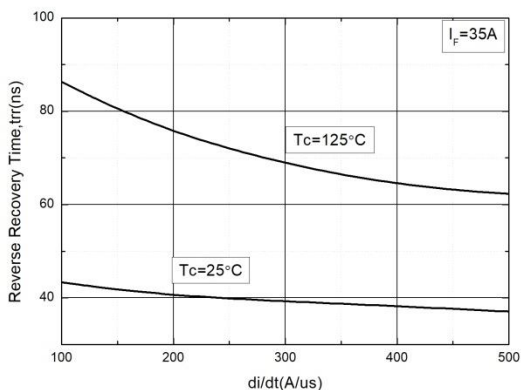


Fig. 4. Typical Reverse Recovery Current vs.  $di/dt$

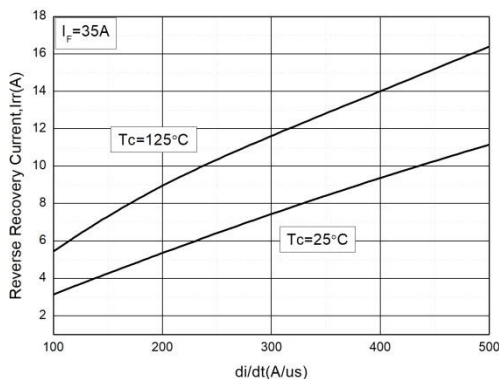

Package Dimensions

TO-3PN

(Dimensions in Millimeters)

