



EMI SUPPRESSORS 電磁干擾抑制器


R6H SERIES

FEATURES 特征

- | | |
|-----------------------------------|------------------------|
| 1. Rugged construction | 4. EMI/RFI Suppression |
| 2. Counter measures for FCC, VDE. | 5. High reliability |
| 3. CSA, CE, VCCI | 6. Long term stability |

APPLICATIONS 用途

1. Telecommunication equipment.
2. Wireless communication equipment.
3. Computer products.
4. General electronic applications where EMI/RFI suppression is required.

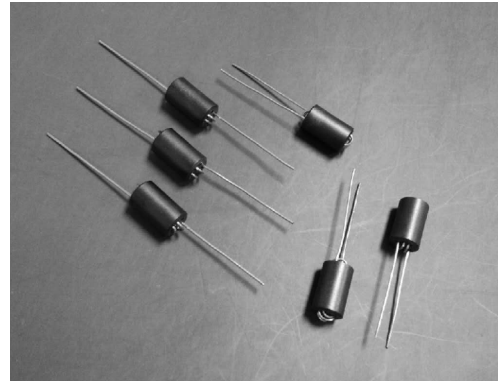


PRODUCT IDENTIFICATION

R6H 10 - 15 - R - LF
 (1) (2) (3) (4) (5)

- (1) .Series name (產品品名) (2) .Inside diameter (孔徑) (3) .Number of turns (圈數)
 (4) .Packing code (包裝) R:卷裝 B:散裝 (5) .Lead free (環保標識)

SHAPES AND DIMENSIONS (Unit:mm)

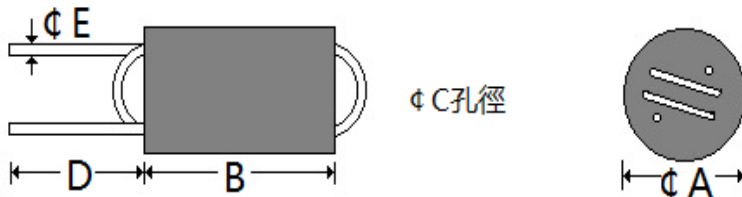

Part No.	Z (Ω) at 100MHz typ.	TURNS	DIMENSIONS(mm)					WINDING DIAGRAM
			φA	B	φC	D(ref.)	φE	
R6H10-15	360	1.5T	6.0±0.5	10.0±0.3	1.0±0.1	20.0±2.0	0.5±0.1	
R6H08-15	450	1.5T			0.8±0.1			
R6H10-20	490	2Ts			1.0±0.1			
R6H08-20	650	2Ts			0.8±0.1			
R6H10-25	710	2.5Ts			1.0±0.1			
R6H08-25	880	2.5Ts			0.8±0.1			
R6H10-30	850	3Ts			1.0±0.1			
R6H08-30	1080	3Ts			0.8±0.1			
R6H10-2×15	360	2×1.5T			1.0±0.1			
R6H08-2×15	450	2×1.5T			0.8±0.1			

TEST INSTRUMENT: HP-4191A or HP-4395A

※Design as Customer's Requested Specifications. (可按顧客的特殊需求設計)